


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	54-00187	Connector, M12 A-code plug, 3 pin, 12xL24 mm, panel mount, solder cup, gold plated, IP67	1	nut and o-ring included
2	30-01761	Wire, hook-up, TS, 22 AWG, UL 11028, 600V, 105C, 1.3 mm, mPPE, brown	1	
3	30-01756	Wire, hook-up, TS, 22 AWG, UL 11028, 600V, 105C, 1.3 mm, mPPE, blue	1	
4	30-01753	Wire, hook-up, TS, 22 AWG, UL 11028, 600V, 105C, 1.3 mm, mPPE, black	1	
5	32-00017	Heat shrink, 1.9 mm ID, 1.5 mm OD, EVA, 2:1 ratio, 125 °C, UL VW-1, thin wall	3	covers solder joints

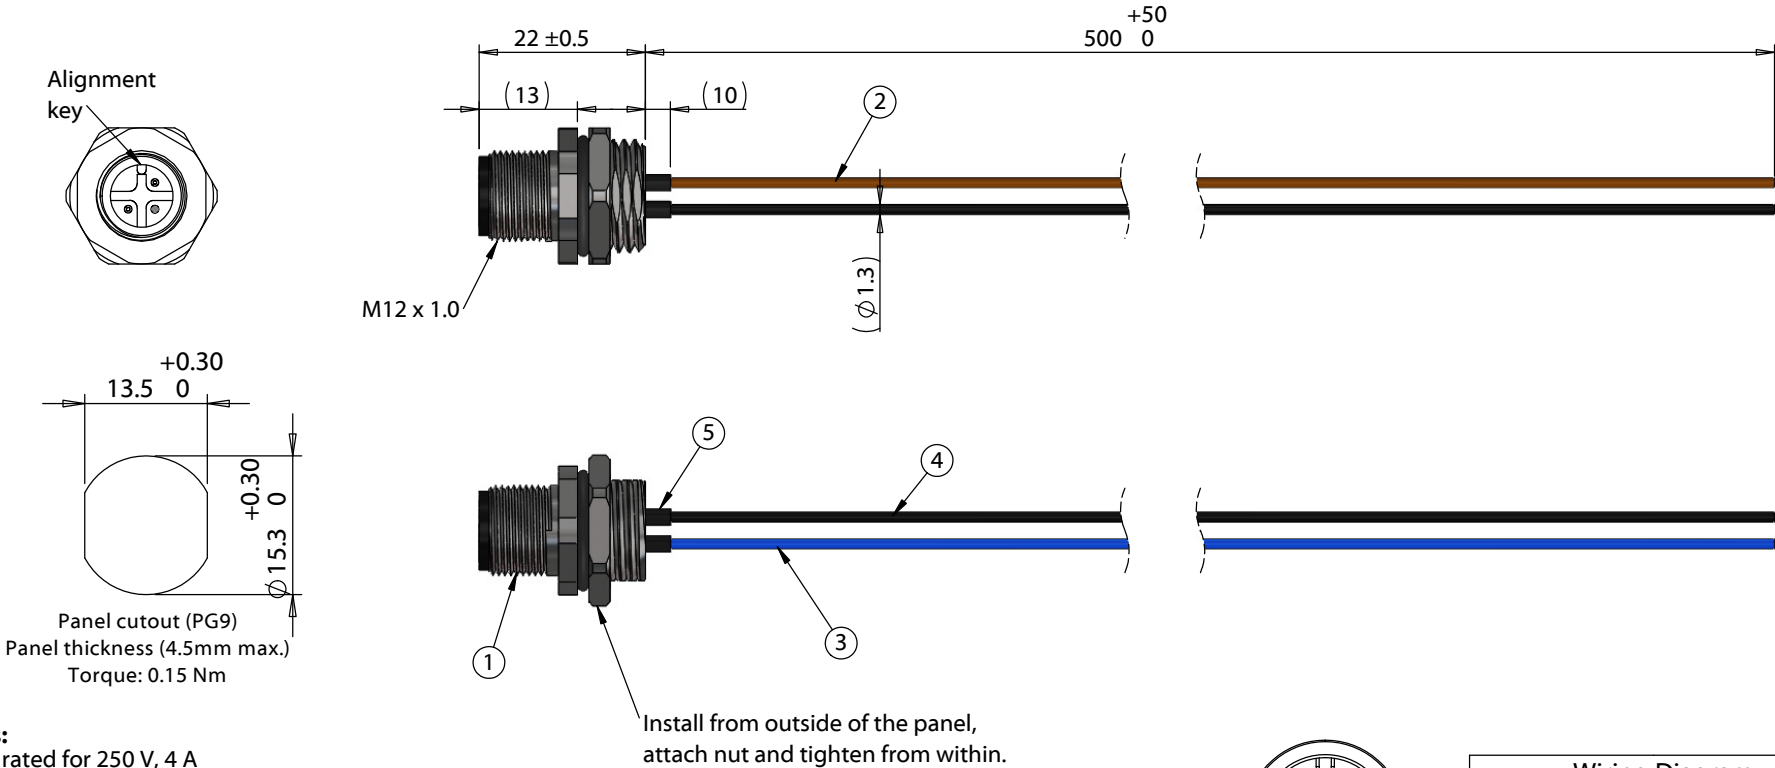


Notes:

Cable rated for 250 V, 4 A
Temperature: -40 ~ 105 °C

IP67 waterproof rating when mated with corresponding (IP67) connector and installed properly in panel

Cables individually packaged in PE bag
Functionally equivalent components may be substituted



Front View
Not to Scale

Wiring Diagram	
54-00187	wire color
1	brown (30-01761)
3	blue (30-01756)
4	black(30-01753)

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	7/07/2025	Initial release	Verified:				
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size:	Part number:	
				Cable, 500 mm, M12 A-code plug 3 pin panel mount 54-00187 to blunt cut, 22 AWG, UL11028, hook-up wire	A	10-06291	
					Scale: 1:1		Sheet 1 of 1