


| ITEM NO. | PART NUMBER | DESCRIPTION                                                                              | QTY. | COMPONENT NOTES         |
|----------|-------------|------------------------------------------------------------------------------------------|------|-------------------------|
| 1        | 54-00370    | Connector, M12 D-code plug, 4 pin, 12xL24 mm, panel mount, solder cup, gold plated, IP67 | 1    | nut and o-ring included |
| 2        | 30-01761    | Wire, hook-up, TS, 22 AWG, UL 11028, 600V, 105C, 1.3 mm, mPPE, brown                     | 1    |                         |
| 3        | 30-01754    | Wire, hook-up, TS, 22 AWG, UL 11028, 600V, 105C, 1.3 mm, mPPE, white                     | 1    |                         |
| 4        | 30-01756    | Wire, hook-up, TS, 22 AWG, UL 11028, 600V, 105C, 1.3 mm, mPPE, blue                      | 1    |                         |
| 5        | 30-01753    | Wire, hook-up, TS, 22 AWG, UL 11028, 600V, 105C, 1.3 mm, mPPE, black                     | 1    |                         |
| 6        | 32-00017    | Heat shrink, 1.9 mm ID, 1.5 mm OD, EVA, 2:1 ratio, 125 °C, UL VW-1, thin wall            | 4    | covers solder joints    |

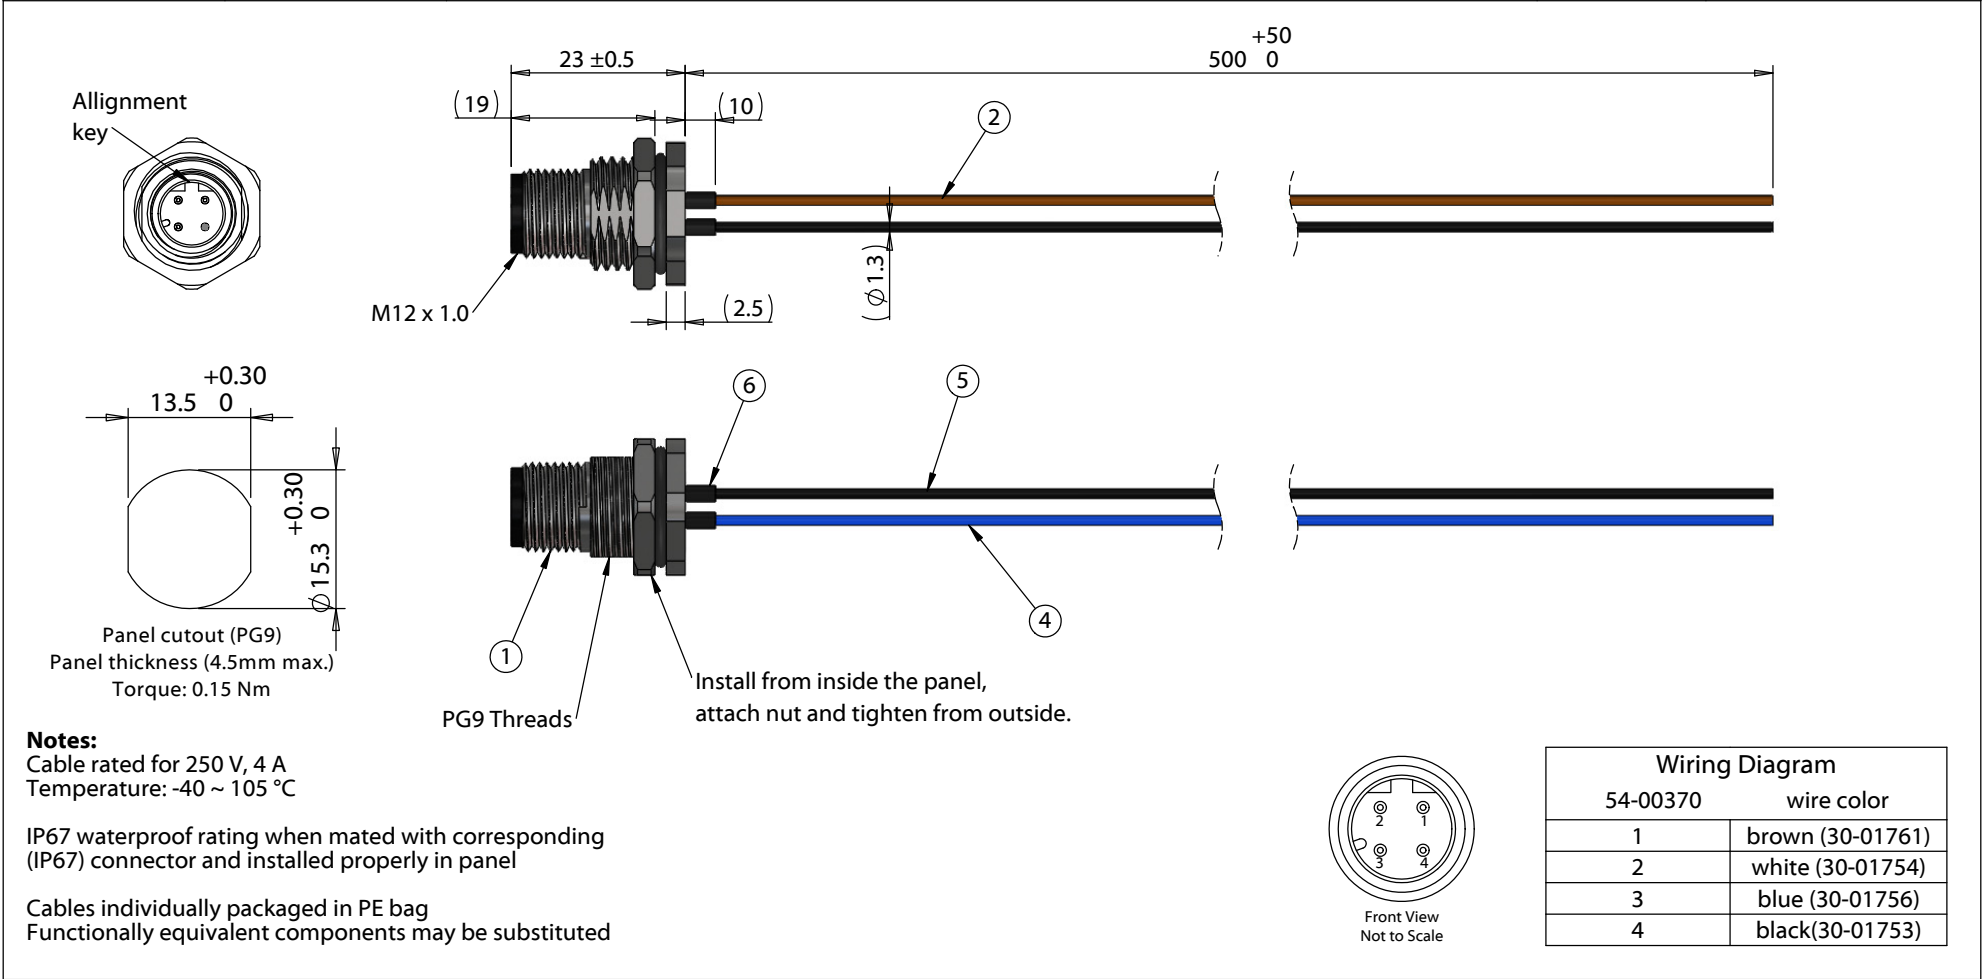

|           |           |                 |                                |                                                                                                       |                                                                                                                                                                                                 |  |  |  |
|-----------|-----------|-----------------|--------------------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| Revision: | Date:     | Description:    | Prepared:                      | Notes:                                                                                                | <div>TENSILITY</div> <div>tel 1.541.323.3228 800 877.670.7118</div> <div>fax 1.541.323.4202 web tensility.com</div> <div>Size: A Part number: 10-06301</div> <div>Scale: 1:1 Sheet 1 of 1</div> |  |  |  |
| A         | 7/07/2025 | Initial release | Verified:                      | RoHS compliant                                                                                        |                                                                                                                                                                                                 |  |  |  |
|           |           |                 | Dimensions are in millimeters. | Function test: no open, no short circuit, no intermittent                                             |                                                                                                                                                                                                 |  |  |  |
|           |           |                 | Tolerances:                    | Description:                                                                                          |                                                                                                                                                                                                 |  |  |  |
|           |           |                 | X: ± 0.5 mm                    | Cable, 500 mm, M12 D-code plug 4 pin panel mount 54-00370 to blunt cut, 22 AWG, UL11028, hook-up wire |                                                                                                                                                                                                 |  |  |  |
|           |           |                 | X.X: ± 0.3 mm                  |                                                                                                       |                                                                                                                                                                                                 |  |  |  |
|           |           |                 | X.XX: ± 0.05 mm                |                                                                                                       |                                                                                                                                                                                                 |  |  |  |

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com