


ITEM NO.	PART NUMBER	DESCRIPTION	COMPONENT NOTES	QTY.
1	50-01028	Connector, M12 D-code socket, 4 pin, 12xL22 mm, molding style, solder cup, gold plated, IP67, shielded		1
2	50-00995	Connector, 8P8C RJ45 plug, IDC, CAT6a, shielded		1
3	30-03676	Wire, 4C, 2PR BC, 24AWG, CAT5e SF/UTP, UL20387, 300V, 105C, 60C oil, UV, 6 mm, shielded, VW-1, PVC		1
4	24-00349	Overmold, M12 plug and jack, 180°	PVC, black	1
5	24-00362	Overmold, RJ45 plug	PVC, black	1

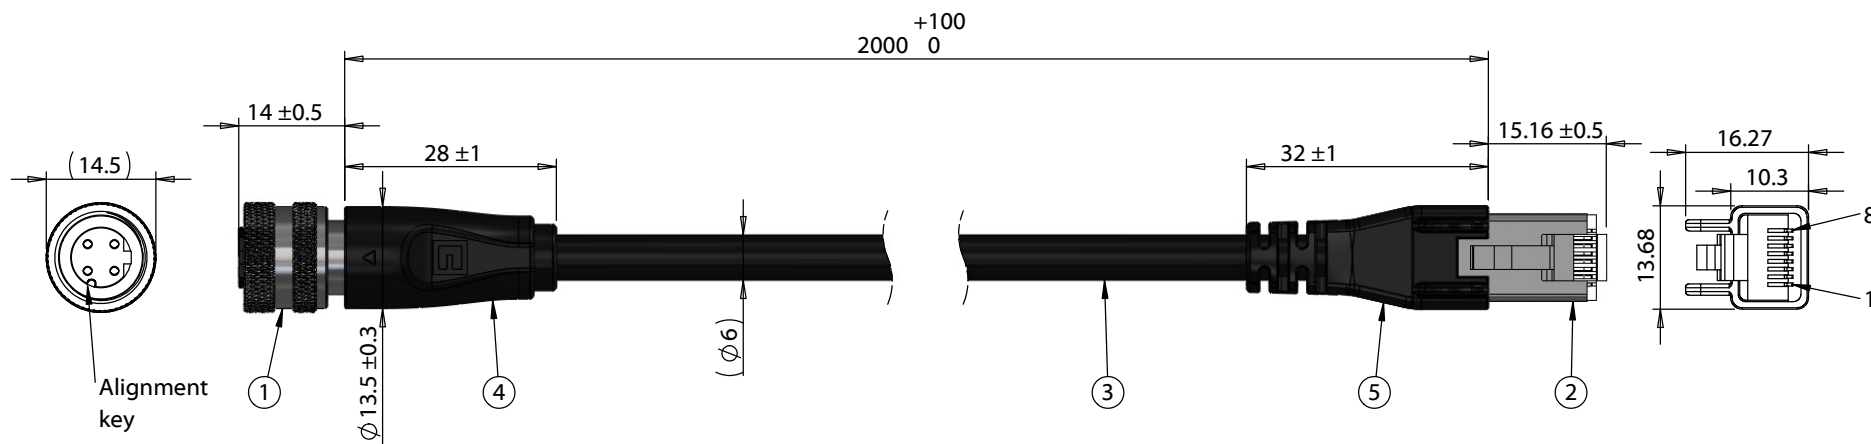

Notes:


Voltage: 48 V
Current: 1.5 A
Temperature: -40 ~ 105 °C
Signal: Ethernet CAT5e, 1 Gbps

Wire:


Oil resistant up to 60 °C
Water resistant up to 75 °C
UV resistant

IP67 waterproof rating when M12 connector mated with corresponding (IP67) M12 connector

Functionally equivalent components may be substituted



Front View
Not to Scale



Wiring Diagram		
50-01028	wire color	50-00995
1	white/orange	1
3	orange	2
2	white/green	3
4	green	6
Shell	Shield	Shell

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	8/19/25	Initial release	Verified:	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances:	Description:	
			X: ± 0.5 mm	Cable, 2000 mm, M12 D-code socket 4 pin 50-01028 to RJ45 plug 8P4C 50-00995, CAT5e, 24 AWG, 30-03676 wire	
			X.X: ± 0.3 mm		Size: A
			X.XX: ± 0.05 mm		Part number: 10-06492
					Scale: 1:1
					Sheet 1 of 1

5

4

3

2

1