

Ratings

Voltage: 60 V
 Temperature: -40~125 °C

Conductor

Conductor count: 1
 Gauge: 14 AWG 1.93 mm²
 Material: tinned copper strands
 Strand size: \varnothing 0.36mm x 19
 Resistance at 20 °C: 8.62 Ω /km max

Insulator

Material: XLPE
 Color: blue
 Diameter: \varnothing 2.6 \pm 0.1
 Nominal thickness: 0.4 mm



Wire marking: TXL AUTOMOTIVE PRIMARY WIRE 14 AWG XLPE
 125°C SAE J1128 TENSILITY

Mechanical Tests

After aging at 155 \pm 3°C for 7 days
 Minimum tensile strength 10 MPa
 Minimum elongation 150% original
 Dielectric test: 1000 Vrms for 1 minute without breakdown
 Flammability: SAE J1128 Resistance to Flame Propagation
 Ozone resistance: 192 hrs @ 65°C, 100 pphm, no cracks or splits

Fluid Compatibility Tests (Name: fluid, test temp (°C))

Engine oil: ASTM D471 IRM-902, 50 \pm 3
 Gasoline: ASTM D471 Ref Fuel C, 23 \pm 5
 Ethanol: 85% ethanol + 15% ASTM D471, Ref Fuel C, 23 \pm 5
 Diesel fuel: 90% ASTM D471 IRM 903 +10% p-xylene, 23 \pm 5
 Power steering: ASTM D471 IRM 903, 50 \pm 3
 Auto trans: Dexron VI SAE J311, 50 \pm 3
 Engine coolant: 50% dist. water + 50% ethylene glycol, 50 \pm 3
 Battery acid: H2SO4 spec. gravity = 1.26 \pm 0.005, 23 \pm 5

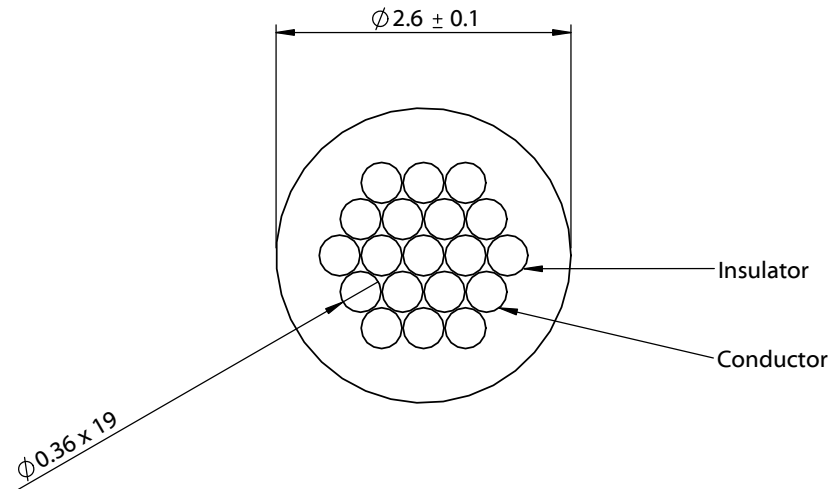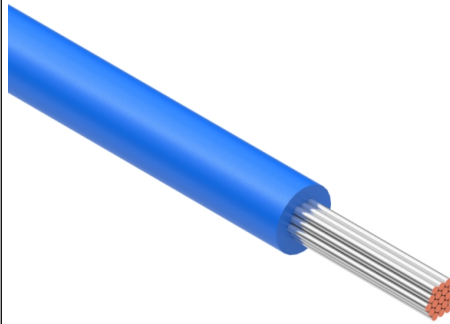

| | | | | | |
|-----------|------------|-----------------|--|--|---|
| Revision: | Date: | Description: | Prepared: | Notes: | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 12/10/2021 | Initial release | Verified: | RoHS compliant Halogen free | |
| | | | Dimensions are in millimeters. Tolerances: X: \pm 0.5 mm X.X: \pm 0.3 mm X.XX: \pm 0.05 mm | Description: | Size: Part number: |
| | | | | Wire, hook-up, TS, 14 AWG, TXL automotive SAE J1128, 60V, 125C, 2.6 mm, XLPE, blue | A 30-02176 |
| | | | | Scale: 15:1 | Sheet 1 of 1 |

5

4

3

2

1