

Electrical
Voltage: 30 V
Temperature: 80 °C
Flammability: VW-1

Transmission USB 3.2 Gen 1x1
Speed rating: 5Gbps @ 20V, 3A max

Type-A to Type-C ratings at 3m long wire:
Differential impedance: $90\Omega \pm 7\Omega$
Differential to common mode: $-20\text{dB}/\text{max}@2.5\sim 7.5\text{GHz}$
Intra-pair skew: 15ps/m

Attenuation @ 3.0M	
GHz	dB
0.1	1.5
1.25	5
2.5	7.5
7.5	25

Type-A to Type-C ratings at 2m long wire:
Differential impedance: $90\Omega \pm 13.5\Omega$
Common mode impedance: $30\Omega \pm 30\%$
Delay: 26ns (5.2ns/m for captive cable)
Intra-pair skew: 100ps

Attenuation @ 2.0M	
MHz	dB
0.512	0.13
0.772	0.15
1	0.2
4	0.39
8	0.57
12	0.76
24	0.95
48	1.35
96	1.9
200	3.2
400	5.8



Tests
Dielectric test: 750Vac/s for 1 minute without breakdown
Spark test: 0.5kV (500Vac)
Tensile strength
Jacket: 1.05 kgf/mm²
HD-PE: 1.4 kgf/mm²
PP: 2.1 kgf/mm²
After aging at $113 \pm 2^\circ\text{C}$ for 7 days:
Minimum jacket tensile strength 75 % original
Minimum insulation tensile strength 70 % original (HD-PE, PP)
Minimum elongation 70 % original (jacket and insulation)


Revision:	Date:	Description:
A	06/20/2024	Initial release

Prepared:
Verified:
Dimensions are in millimeters. Tolerances:
X: $\pm 0.5\text{ mm}$ X.X: $\pm 0.3\text{ mm}$ X.XX: $\pm 0.05\text{ mm}$

Notes:
RoHS compliant
Function test: no open, no short circuit, no intermittent
Description:
Wire, 8C TS, 3PR + 2C, 32 to 22 AWG, UL21104, 30 V, 80C, 4.30 mm, braidfoil, VW-1, TPE, USB 3.2, white

TENSILITY	
tel 1.541.323.3228 800 877.670.7118	
fax 1.541.323.4202 web tensility.com	
Size:	Part number:
A	30-03507
Scale: 15:1	Sheet 1 of 2

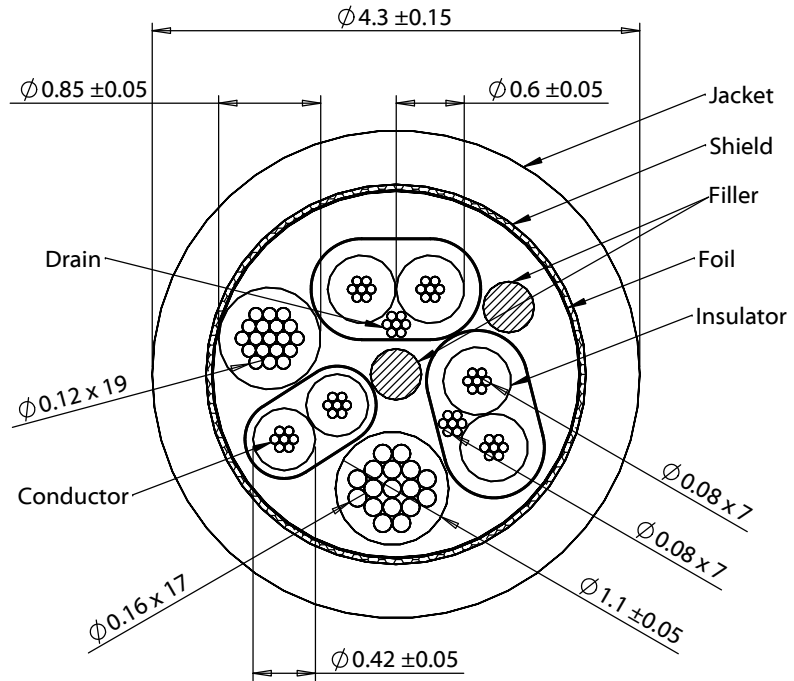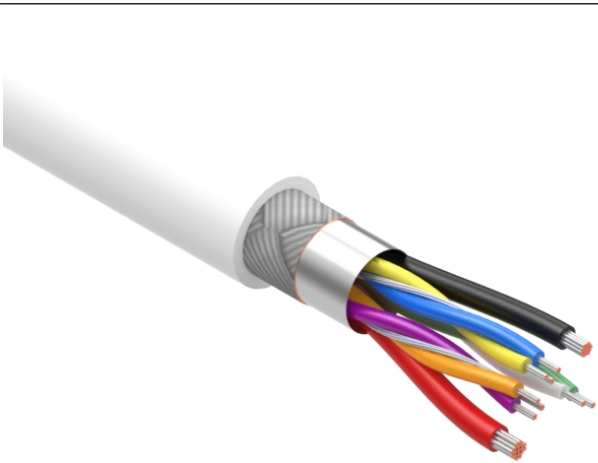

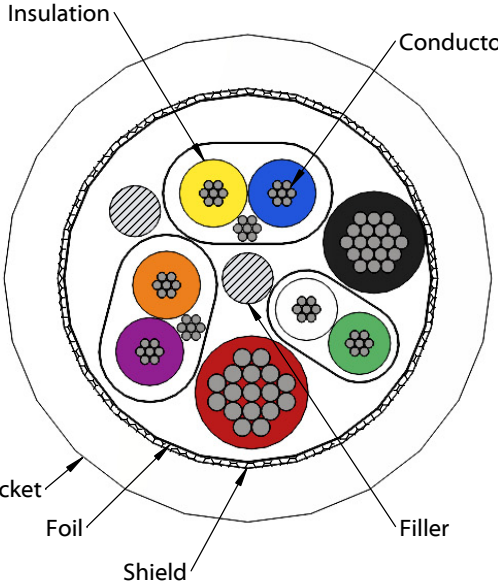Construction Item			Construction Item A	Construction Item B	Construction Item C	Construction Item D			
Conductor	Guage	32 AWG	32 AWG	22 AWG	24 AWG				
	Material	Tinned copper	Tinned copper	Tinned copper	Tinned copper				
	Strand size	7/0.08	7/0.08	17/0.16	19/0.12				
	Resistance at 20 °C	588 Ω/km max	588 Ω/km max	55 Ω/km max	86 Ω/km max				
Insulator	Material	LLD-PE+HD-PE	PP	PP	PP				
	Diameter	0.6±0.05 mm	0.42±0.05 mm	1.1±0.05 mm	0.85±0.05 mm				
	Average thickness	0.18 mm	0.1 mm	0.17 mm	0.12 mm				
	Color	See color code	See color code	See color code	See color code				
	Resistance at 20 °C	100 MΩ/km min	100 MΩ/km min	100 MΩ/km min	100 MΩ/km min				
	Direction	Left (Z)	Left (Z)	-	-				
Twist pair	Diameter	1.20 mm	1.10 mm	-	-				
	Guage	32 AWG	-	-	-				
Drain wire	Material	Tinned copper	-	-	-				
	Material	Aluminum mylar	-	-	-				
Inside-Tape Wrap (1)	Conductive Side	facing inside	-	-	-				
	Overlap	25% min	-	-	-				
Inside-Tape Wrap (2)	Material	Hot melting-Mylar	-	-	-				
	Overlap	25% min	-	-	-				
Layer	Direction	Left (Z)							
	Filler	Cotton							
Outside-Tape Wrap	Material	Aluminum mylar							
	Conductive Side	Facing Outside							
	Overlap	25% min							
Outside-Shield	Type	Braid							
	Material	Tinned copper							
	Coverage	65% min							
Outside-Jacket	Material	TPE							
	Diameter	4.3±0.15 mm							
	Average thickness	0.5 mm							
	Color	White							
Wire Marking	Color	Black							
	Marking	E339579 UL AWM STYLE 21104 80°C 30V VW-1 USB 3.2 CABLE TENSILITY							
Revision:	Date:	Description:	Prepared:	Notes:		TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com Size: A Part number: 30-03507 Scale: 15:1  Sheet 2 of 2			
A	06/20/2024	Initial release	Verified:						RoHS compliant
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Function test: no open, no short circuit, no intermittent					
				Description:					
				Wire, 8C TS, 3PR + 2C, 32 to 22 AWG, UL21104, 30 V, 80C, 4.30 mm, braidfoil, VW-1, TPE, USB 3.2, white					

