

**Ratings**  
 Voltage: 300 V  
 Temperature  
 Static: -40 to 105 °C  
 Dynamic: -20 to 105 °C  
 Flammability: VW-1  
 Water resistant: 75 °C  
 Oil resistant: 60 °C (jacket)  
 ≥50% elongation and tensile strength after aging  
 UV resistance: jacket, 720 hours xenon or carbon arc exposure  
 ≥80% tensile strength and elongation after aging

**Conductor**  
 Conductor count: 4  
 Gauge: 22 AWG 0.32 mm<sup>2</sup>  
 Material: tinned copper strands  
 Strand size:  $\phi 0.16$  (x 17) mm  
 Resistance at 20 °C: 59.4  $\Omega$ /km

**Insulator**  
 Material: PVC  
 Color: brown, white, blue, black  
 Diameter:  $\phi 1.6 \pm 0.10$  mm  
 Nominal thickness: 0.38 mm  
 Resistance at 20 °C: 2.5 M $\Omega$ /kft



**Wrap**  
 Material: Cotton paper

**Outer jacket**  
 Material: PVC, 80A  
 Color: black  
 Diameter:  $\phi 5.6 \pm 0.20$  mm  
 Nominal thickness: 0.80 mm

**Wire marking:**  
 E339579 UL AWM STYLE 20387 22 AWG 105°C 300V VW-1 60°C OIL  
 RESISTANT UV RESISTANT TENSILITY

**Bend radius**  
 Minimum: 6 times diameter (33.6 mm)

**Use:**  
 External wiring

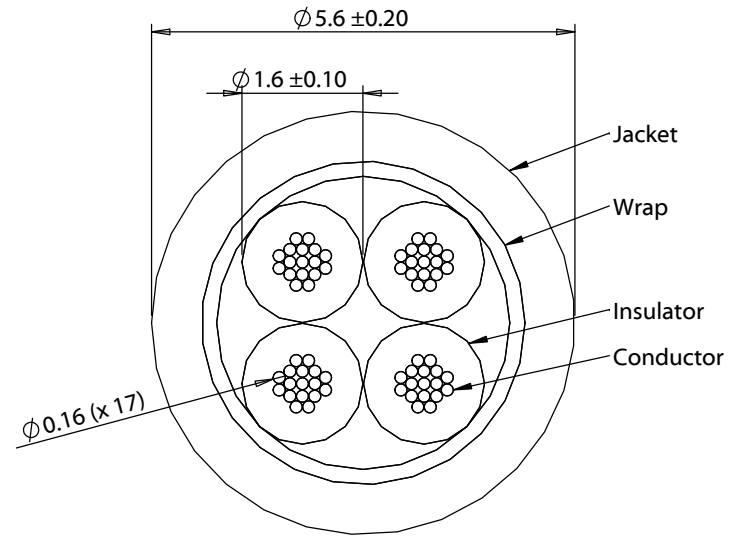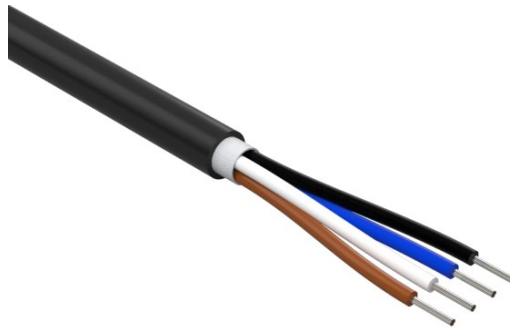

|           |            |                 |  |  |   |
|-----------|------------|-----------------|--|--|---|
| Revision: | Date:      | Description:    | Prepared:  | Notes:   | <b>TENSILITY</b><br>tel 1.541.323.3228 800 877.670.7118<br>fax 1.541.323.4202 web tensility.com |
| A         | 10/16/2025 | initial release | Verified:  | RoHS compliant<br>Function test: no open, no short circuit, no intermittent          |   |
|           |            |                 | Dimensions are in millimeters.<br>Tolerances:<br>X: $\pm 0.3$ mm<br>X.X: $\pm 0.1$ mm<br>X.XX: $\pm 0.05$ mm | Description:   | Size: Part number:  |
|           |            |                 |  | Wire, 4C TS, 22 AWG, UL20387, 300V, 105C, 60C oil, UV, 5.6 mm, VW-1, PVC, 80A, black | A 30-03673  |
|           |            |                 |  | Scale: 10:1  | Sheet 1 of 1  |

5

4

3

2

1