

Ratings

Voltage: 300 V

Temperature:

Dynamic Temperature: - 25 ~ 105 °C

Static Temperature: - 40 ~105 °C

Flammability: VW-1

Conductor

Conductor count: 1

Gauge: 16 AWG 1.31 mm²

Material: tinned copper strands

Strand size: $\phi 0.25$ (x 26) mmResistance at 20 °C: 14.6 Ω /km max**Insulator**

Material: PVC

Color: Brown

Diameter: $\phi 2.4 \pm 0.10$ mm

Nominal thickness: 0.38 mm

Resistance at 20 °C: 2.5 M Ω /kft**Wire marking:** E339579 UL AWM STYLE 1569 105°C 300V or 1007
16 AWG 80°C 300V VW-1 --- cUL AWM I A 105°C 300V FT1 TENSILITY**Tests**

Insulation tensile strength: 10.3 MPa

After aging at 136 ± 1 °C for 7 days:

Minimum tensile strength 70 % original

Minimum elongation 65 % original

Heat shock: 136 ± 1 °C / 1 hour, no observed degradationDeformation: Load 2.45N, 121 ± 1 °C / 1 hour


Maximum decrease in thickness 50%

Cold bend: -25 ± 2 °C / 4 hour, no observed cracking

Spark test: 3000 V

Minimum Bend Radius

Static: 4 times diameter (9.6 mm)

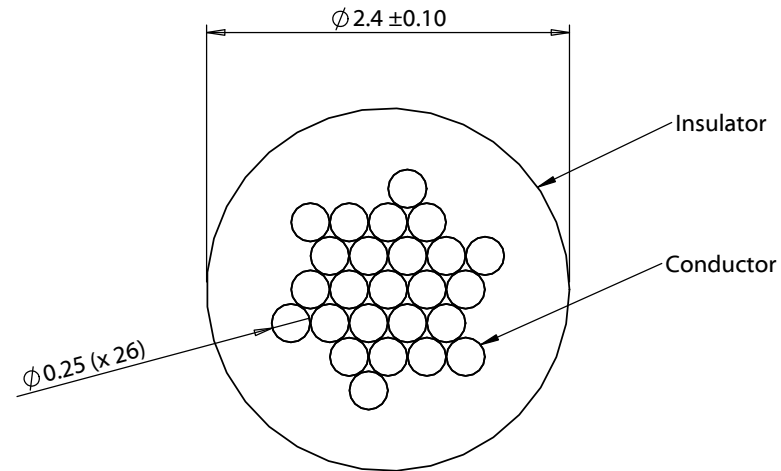

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	11/25/25	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent			
			Dimensions are in millimeters.	Description:	Size:	Part number:	
			Tolerances:	Wire, hook-up, TS, 16 AWG, UL1007, UL1569, 300V, 105C, 2.4 mm, VW-1, PVC, brown	A	30-03709	
			X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		Scale: 20:1	 	Sheet 1 of 1

5

4

3

2

1