Ratings
Voltage: 300 V
Temperature: -30~75°C (static). -20~75°C (dynamic)
Flammability: FT6

Conductors
Gauge: 24 AWG 0.20 mm²
Conductor: tinned copper strands
Stranding: ∅0.2 (x7)
Conductor resistance at 20 °C: 94.2 Ω /km max

Insulation
Color: white-green / green
Material: flourinated ethylene propylene (FEP)
Diameter: ∅1.75 ±0.10 mm
Nominal thickness: 0.54 mm
Resistance at 20 °C: 2.5 MΩ /kft min

Shield
Type: tinned copper braid
Stranding: Ø0.10 mm, 65% minimum coverage

Wrap:
Material: aluminum foil (facing out)

Outer jacket
Material: PVC, 90A
Color: black
Diameter: ∅5.2 ±0.35 mm
Nominal thickness: 0.50 mm

Jacket marking: E540825 UL STYLE CMP 75°C - - - cUL CMP 75°C TENSILITY

Mechanical tests
Tensile strength: 13.8 MPa (jacket)
Heat aging: Elongation 50% MIN; Tensile strength 75% MIN after aging at 100°C for 240 hrs
Cold bend: no deformation after aging at -20°C for 4 hours
Bend radius: 62.4 mm (Static), 78 mm (dynamic)

Electrical tests
Dielectric: 1.5 kV for 1 min, no breakdown
Characteristic impedance: 100 ± 15 Ω

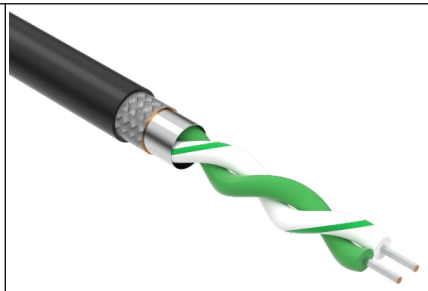

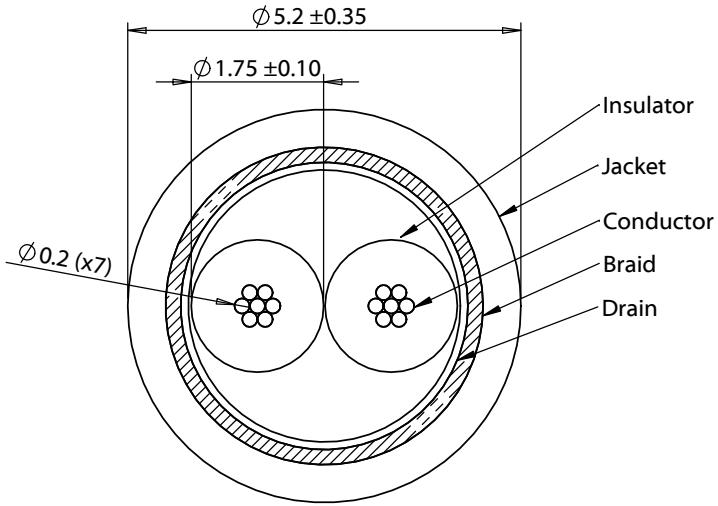

Revision:	Date:	Description:
A	03/24/2026	Initial release

Prepared: CR Digitally signed by CR Date: 2026.05.04 12:06:28 -07'00'

Verified: KM Digitally signed by KM Date: 2026.05.06 13:38:47 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant

Approved for use in plenums
FT6 flammability rating

Description:
Wire, 2C, TS, 1PR 24 AWG, CMP, 300V, 75°C, 5.2 mm, shielded, PVC

TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A
Part number: 30-03842
Scale: 10:1
Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1