Style
M12 socket, flush panel mount
4 pin, D-coding

Ratings
Voltage: 250 V
Current: 4 A
Ingress protection: IP67

Operating Temperature Range
-40 ~ 105 °C, relative humidity of 85% or less

Materials
(1) Insulator: Nylon, PA66 + 33% GF, black
(2) Shell: C3771 brass, nickel plated
(3) Pin: C3771 brass, gold plated
(4) Nut: C3771 brass, nickel plated
(5) O-ring: Silicone rubber
(6) Epoxy: Epoxy resin

Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements
Life cycle: 500 mating cycles

Environmental Requirements
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hours

Compatibility
Maximum wire gauge: 22 AWG



Front View
Not to Scale

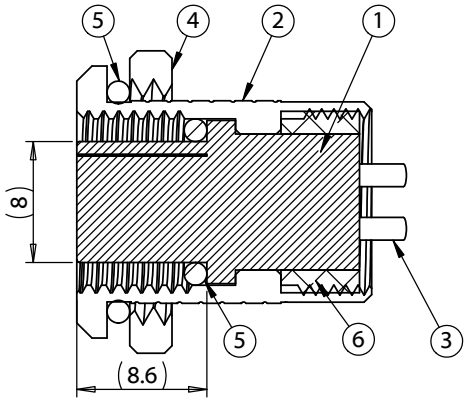



Panel cutout (PG9)
Panel thickness (7 mm max.)
Torque: 0.18 Nm

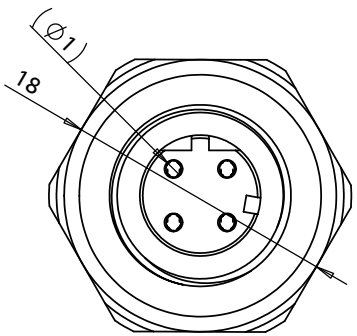

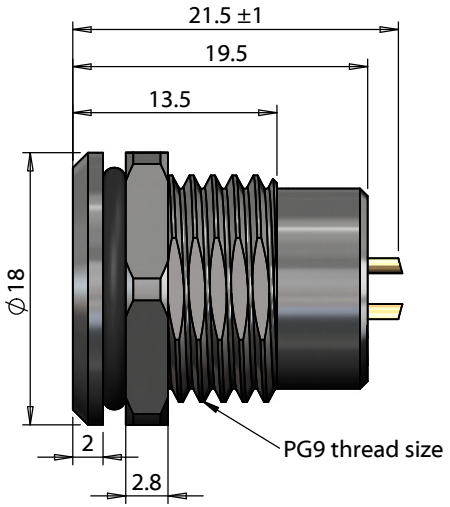

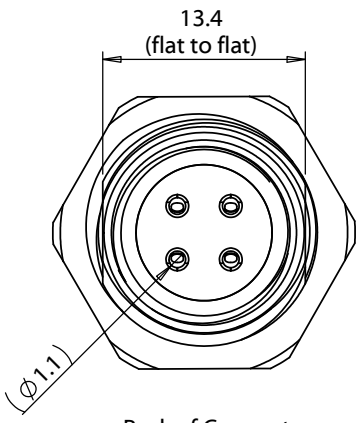

Back of Connector

Revision:	Date:	Description:
A	03/27/2026	Initial release

Prepared: CR
Digitally signed by CR
Date: 2026.04.08 11:06:32 -07'00'

Verified: KW
Digitally signed by KW
Date: 2026.04.09 10:41:41 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.3 mm
X.X: ± 0.1 mm
X.XX: ± 0.05 mm

Notes:
RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:
Connector, M12 D-code socket, 4 pin, 12xL21.5 mm, panel mount, solder cup, gold plated, IP67

TENSILITY
tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A
Part number: 54-00558
Scale: 2:1
Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com

5 4 3 2 1