

Style
M12 90° Plug
5 pin
D-coding

Ratings
Voltage: 60 V
Current: 4 A

Operating Temperature Range
-40~120°C

- Materials**
- ① Insulator: Polyamide 66 (PA66), UL94 V-0, black
 - ② Pin: C3604 Brass, gold plated
 - ③ M12 Shell: C3604 Brass, nickel plated
 - ④ Outer Shell: Polyamide 66 (PA66), UL94 V-0, black
 - ⑤ Collect nut: Polyamide 66 (PA66), UL94 V-0, black
 - ⑥ Collect: Polyamide 66 (PA66), UL94 V-0, black
 - ⑦ O-ring: Silicone, green


Electrical Requirements
Dielectric strength: 1 min @ 1500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 0.5 Ω or less

Mechanical Requirements
Life cycle: 1000 mating cycles minimum





Assembly Info
Moisture resistant
Waterproof: IP67
Suitable cable OD: 4.0 ~ 6.2 mm
Terminal style: screw
Max torque force:
M12 shell: 0.4 Nm
Collect nut: 0.8 ~ 1.0 Nm

Recommended Wires

AWG	TPU wire	PVC wire	4A compatible
20	30-03085	30-01665	Yes
22	30-03086	30-01666	Yes
24	30-03087	30-01667	Yes
26	30-03088	30-01668	No
28	30-03089	30-01669	No
30	30-03090	30-01670	No
32	30-03091	30-01671	No



Front View
Not to Scale

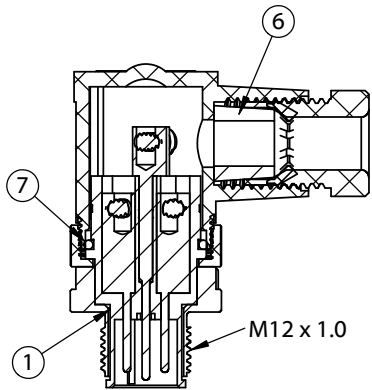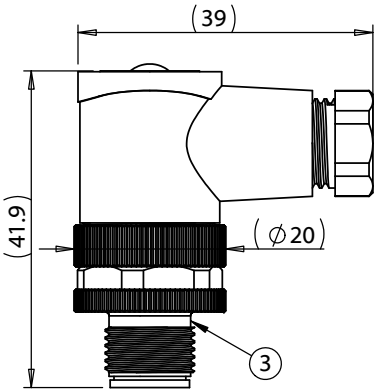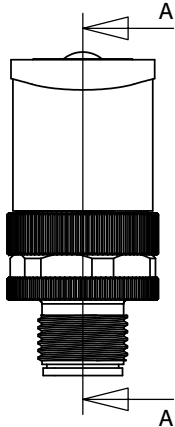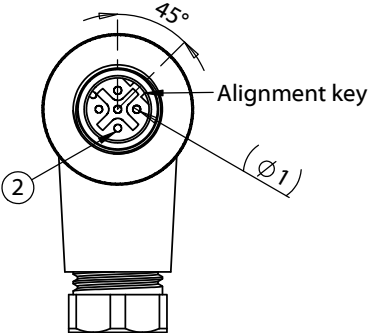

SECTION A-A

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	05/22/2024	Initial release	Verified:	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, M12 D-code plug, 5 pin, 12xL39 mm, 90° gold plated, assembly style, screw terminal, IP67, metal thread	
				Size: A	Part number: 55-00280
				Scale: 1:1	Sheet 1 of 1