

Style
M12 Plug
5 pin
D-coding

Ratings
Voltage: 60 V
Current: 4 A
Flammability: UL94 V-0

Operating Temperature Range
-25 ~ 80 °C

- Materials**
- ① Insulator: Polyamide 66 (PA66), UL94 V-0, black
 - ② Pin: C3604 Brass, gold plated
 - ③ M12 Shell: Zinc alloy, nickel plated
 - ④ Screw: Polyamide 66 (PA66), UL94 V-0, black
 - ⑤ Outer Shell: Polyamide 66 (PA66), UL94 V-0, black
 - ⑥ Collet nut: Polyamide 66 (PA66), UL94 V-0, black
 - ⑦ Collet: Silicone, black
 - ⑧ O-ring: Silicone, green


Electrical Requirements
Dielectric strength: 1 min @ 1500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements
Life cycle: 500 mating cycles minimum



Assembly Info
Allen key: 1.0 mm (included)
Waterproof: IP67
Recommended cable OD: 4.0 ~ 8.0 mm
Terminal style: screw, 1.0 mm diameter
Max torque force:
M12 shell: 0.4 Nm
Collet nut: 0.8 ~ 1.0 Nm

Recommended Wires

AWG	TPU wire	PVC wire	4A compatible
22	30-03086	30-01666	Yes



Front View
Not to Scale

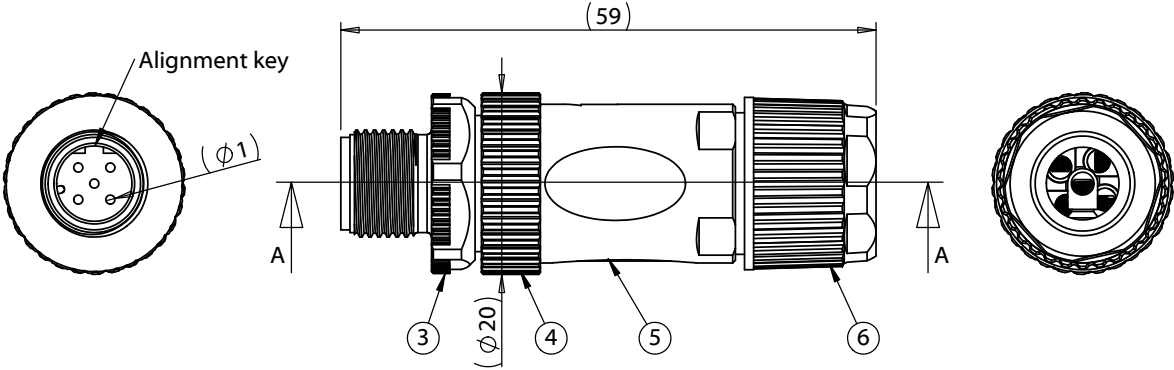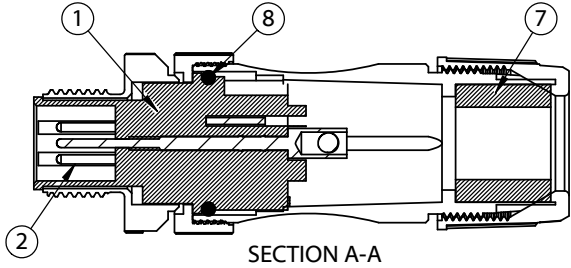

Revision:	Date:	Description:	Prepared: CR Digitally signed by CR Date: 2026.07.30 09:17:25 -07'00'	Notes: RoHS compliant	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	07/28/2026	Initial release	Verified: KW Digitally signed by KW Date: 2026.07.30 14:14:17 -07'00'	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, M12 D-code plug, 5 pin, 12xL59 mm, gold plated, assembly style, screw terminal, IP67, metal thread	Size: A Part number: 55-00499
					Scale: 1.2:1 Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com