

Materials

C3604 Brass, gold plated

Environmental Requirements

Cold test: -25 ± 3 °C for 48 hours without deformation

Heat test: 70 °C, relative humidity 70-85% for 96 hours without deformation

Humidity test: 40 °C, relative humidity 90-100% for 96 hours without deformation

Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.

Note



To be used with

55-00254

55-00255

55-00256

55-00257

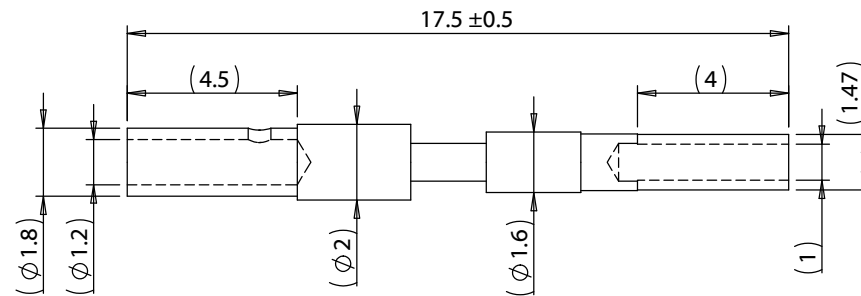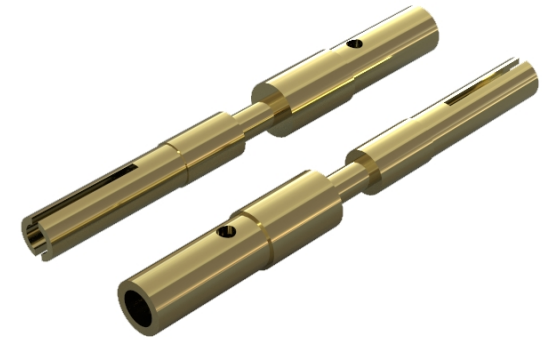

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	12/17/2025	Initial release	Verified:		
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Hardware, socket, pin, crimp 1.5xL17.5 mm, gold plated	A 56-00050
					Scale: 5:1

5

4

3

2

1