


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00314	Connector, dc plug, 5.5x2.5xL21mm, brass, nickel plated, molding type, white insulators	1	
2	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	
3	30-00396	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A, white	1	
4	24-00003	Overmold, PVC, white	1	
5	24-00004	Overmold, PVC, white	1	

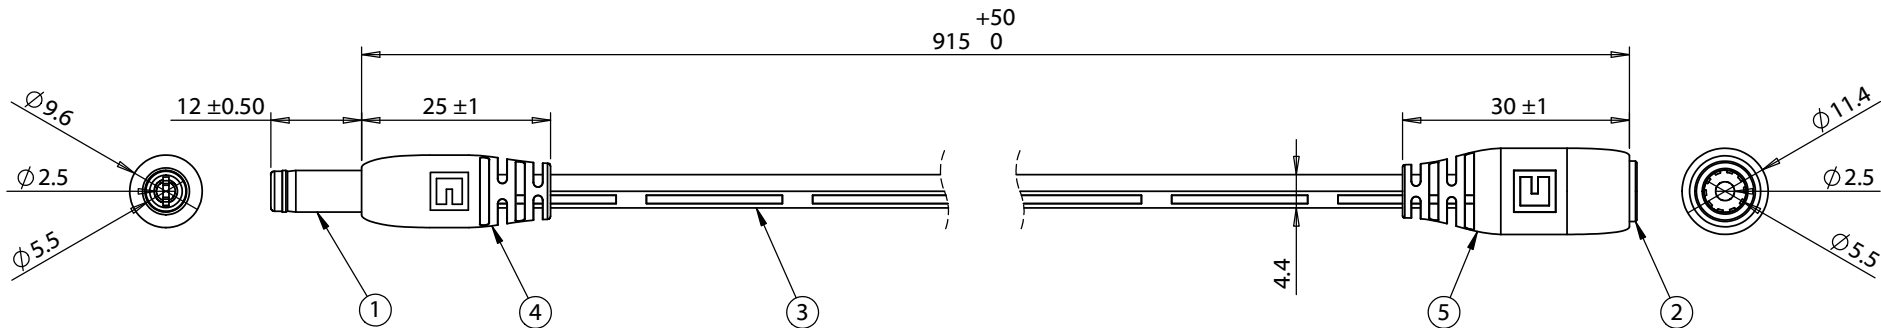

Notes:
Cables individually tied and bundled in groups of 10
Functionally equivalent components may be substituted
7 A, 48 Vdc

Wiring Diagram		
50-00314	wire color	50-00027
center	white with stripe	center
sleeve	white	sleeve

Revision:	Date:	Description:	Prepared: AL Digitally signed by AL Date: 2024.06.19 15:35:26 -07'00'	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	12/11/2015	Initial release	Verified: LV Digitally signed by LV Date: 2024.06.20 09:19:41 -07'00'	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 915 mm, 5.5x2.5x12 mm 50-00314 plug to 5.5x2.5 mm 50-00027 jack, 18 AWG, 30-00396 wire, white	
Size: A					Part number: 10-01252
Scale: 1:2					Sheet 1 of 1