


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00027	Connector, dc jack, 5.5x2.5xL17.4 mm, molding style	1	
2	30-00003	Wire, 2C BC, 24 AWG, UL2468, 300V, 80C, 3.6 mm, VW-1, PVC	1	
3	24-00004	Overmold	1	black
4	24-00251	Overmold, strain relief, 7x5x2.5 mm bushing, UL2468 wire	1	black

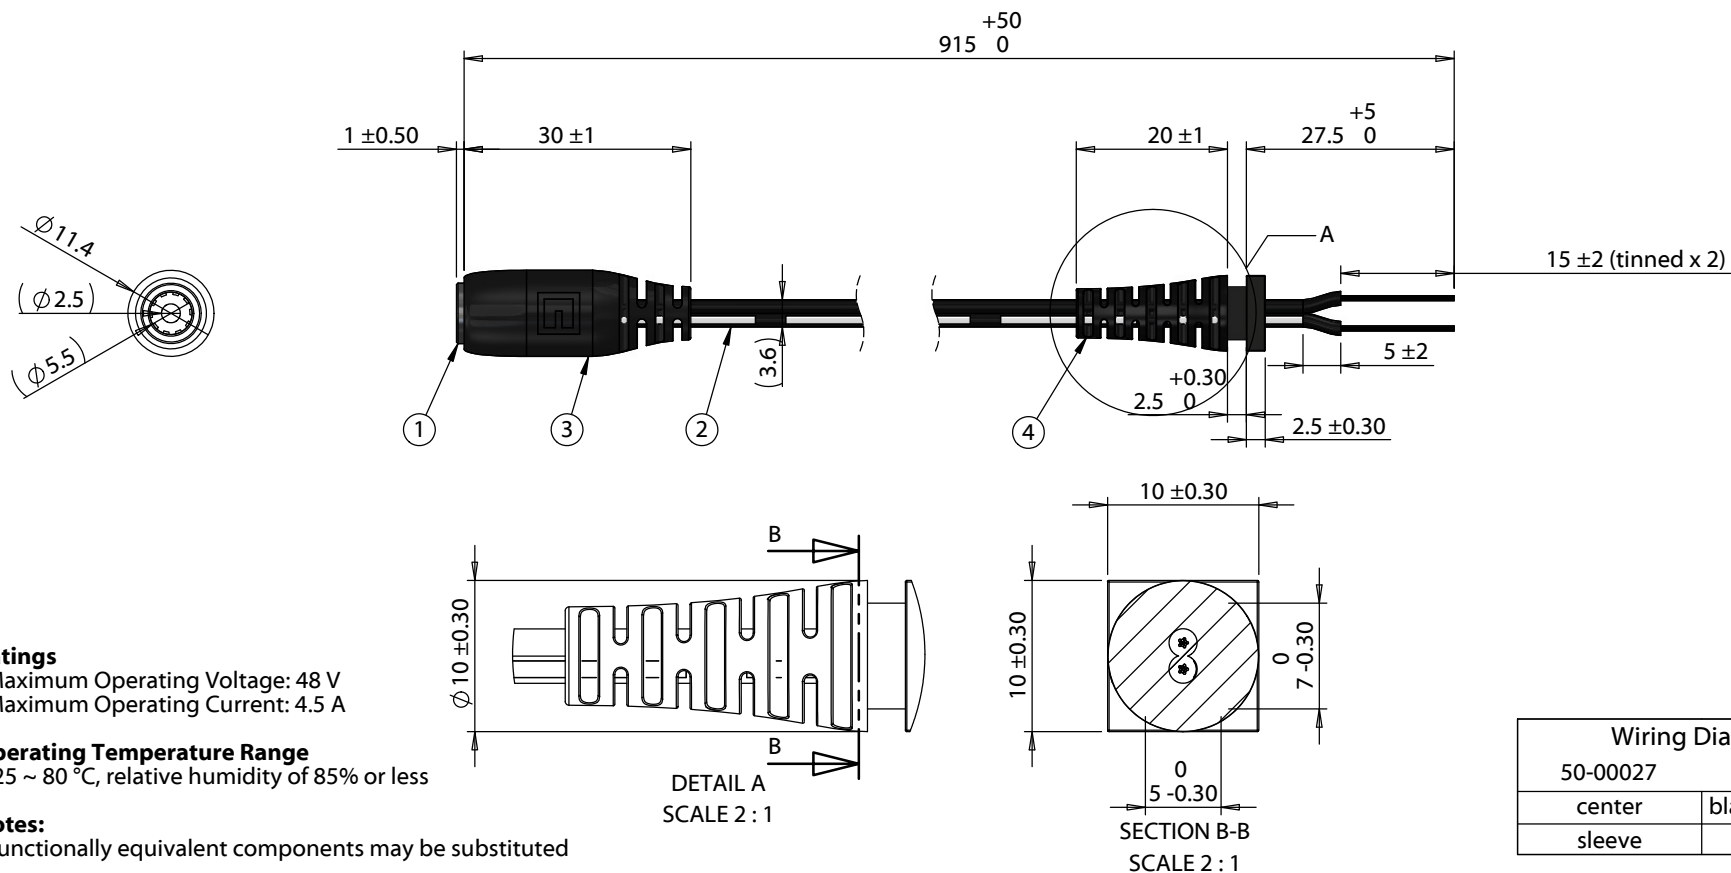

Ratings

Maximum Operating Voltage: 48 V
Maximum Operating Current: 4.5 A

Operating Temperature Range

-25 ~ 80 °C, relative humidity of 85% or less

Notes:

Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	03/28/2018	Initial release	CR	RoHS and REACH compliant	
			Verified:	Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters.	Description:	
			Tolerances:	Cable, 915 mm, 5.5x2.5 mm 50-00027 dc jack to strain relief 10 mm tinned, 24 AWG, UL2468 wire	
			X: ± 0.5 mm		Size: A
			X.X: ± 0.3 mm		Part number: 10-02960
			X.XX: ± 0.05 mm		Scale: 1:1
					Sheet 1 of 1