


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-01061	Connector, USB C 3.2 Gen1x1 plug, stainless steel shell, molding style	1	
2	50-01063	Connector, USB A 3.2 Gen 1x1 plug, nickel plated shell, molding style, blue insulator	1	
3	30-03507	Wire, 8C TS, 3PR + 2C, 32 to 22 AWG, UL21104, 30 V, 80C, 4.30 mm, braidfoil, VW-1, TPE, USB 3.2, white	1	
4	24-00326	Overmold, USB type C, 31.5 mm	1	TPE, white
5	24-00446	Overmold, USB type A 3.2, 31 mm	1	TPE, white

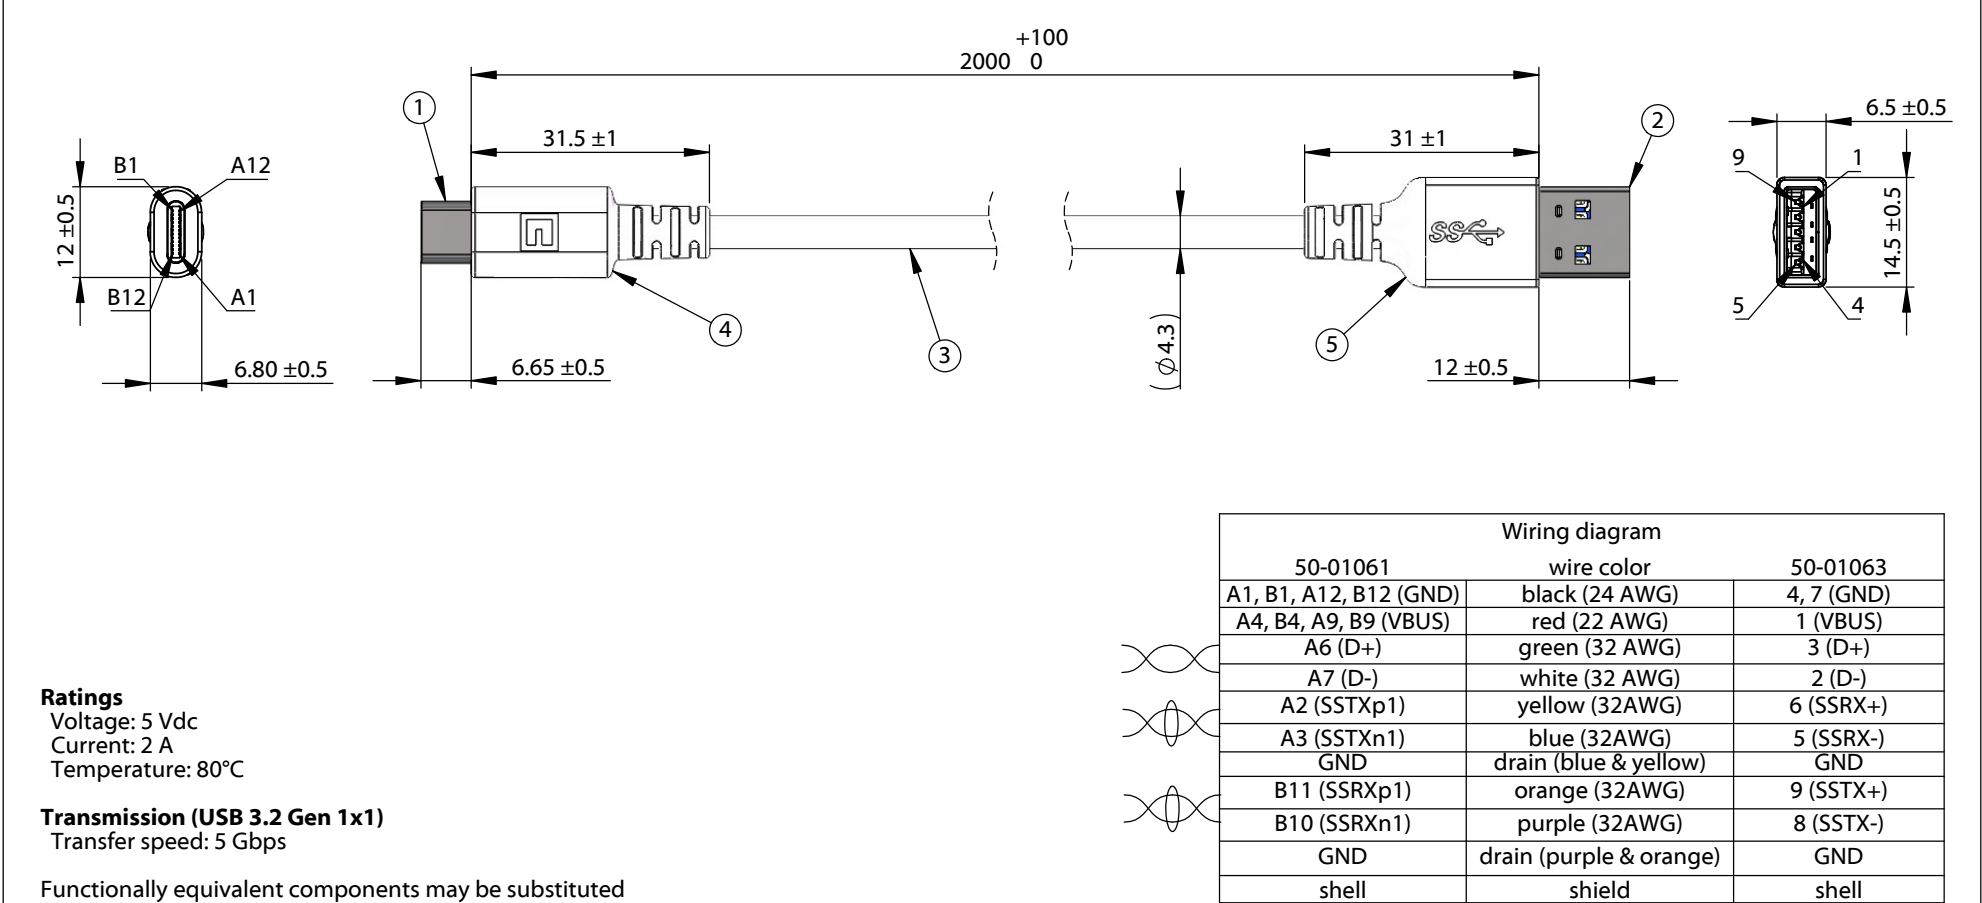

Ratings
Voltage: 5 Vdc
Current: 2 A
Temperature: 80°C

Transmission (USB 3.2 Gen 1x1)
Transfer speed: 5 Gbps

Functionally equivalent components may be substituted

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	11/21/2024	Initial release	Verified:				
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 2000 mm, 50-01061 USB C plug to 50-01063 USB A plug, 30-03507 wire, shielded, USB 3.2 Gen 1x1, white	Size: A	Part number: 10-06150	
					Scale: 1:1		Sheet 1 of 1

5

↑

4

3

2

1