


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00980	Connector, M12 A-code socket, 4 pin, 12xL22 mm, molding style, solder cup, gold plated, IP67, shielded	1	
2	50-00987	Connector, M12 A-code plug, 4 pin, 12xL22 mm, molding style, solder cup, gold plated, IP67, shielded	1	
3	30-03006	Wire, 4C TS, 22 AWG, UL21765, 300V, 105C, 60C oil, UV, 6.2 mm, shielded, VW-1, TPU	1	
4	24-00349	Overmold, M12 plug and jack, 180°	2	TPU, black

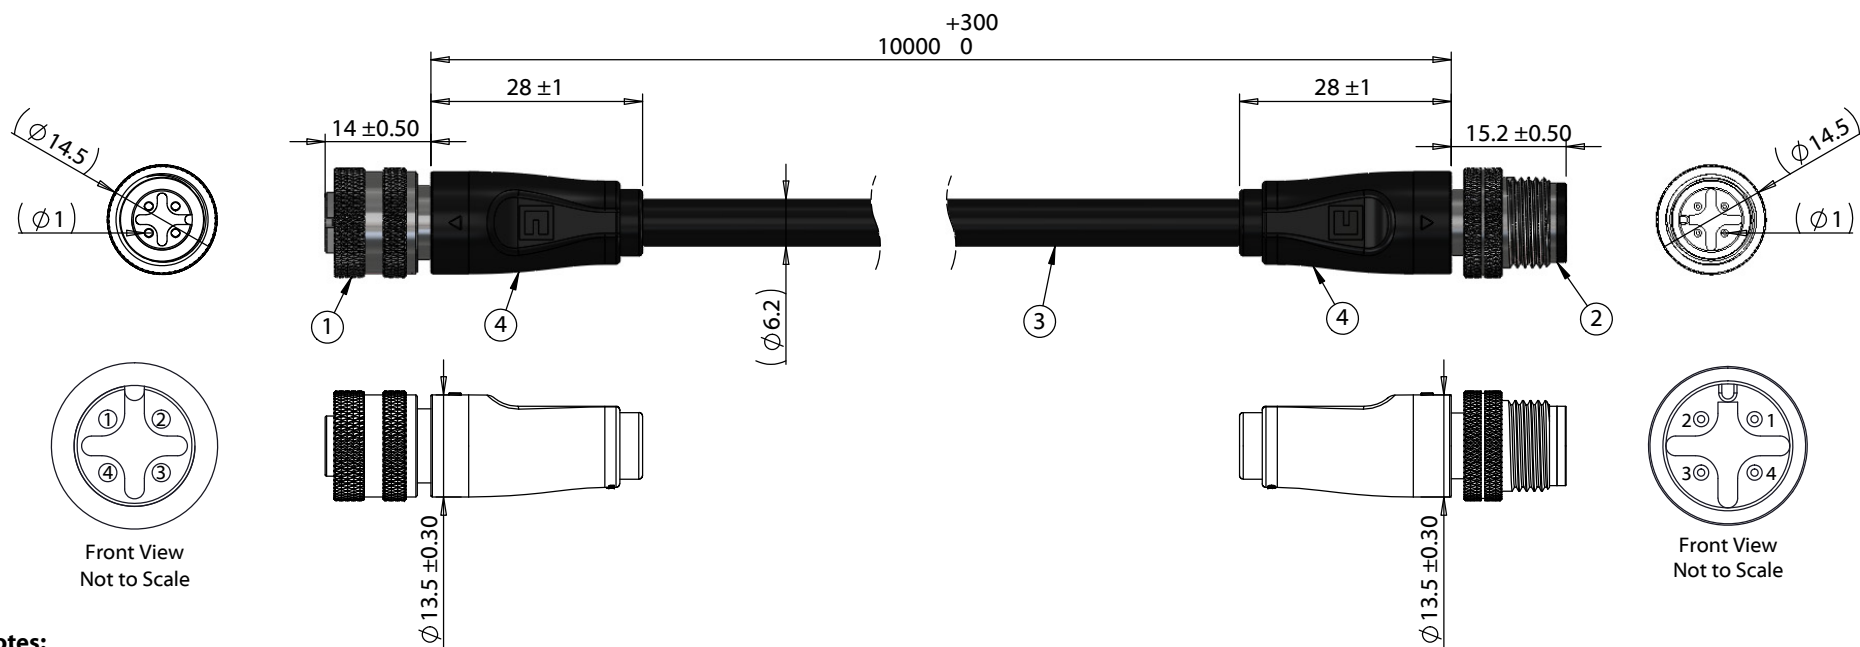

Notes:
Cable rated for 250 V, 4 A
Temperature: -40 ~ 105 °C
Oil resistant up to 60 °C
Water resistant up to 75 °C
UV resistant

IP67 waterproof rating when mated with corresponding (IP67) connector

Functionally equivalent components may be substituted

Wiring Diagram		
50-00980	wire color	50-00987
1	red	1
2	yellow	2
3	black	3
4	white	4
Shell	shield/drain	Shell

Revision:	Date:	Description:	Prepared:	Notes:	<div>TENSILITY</div> <div> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com </div> <div> Size: A Part number: 10-06201 </div> <div> Scale: 1:1 </div>
A	01/07/2025	Initial release	Verified:	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances:	Description:	
			X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Cable, 10000 mm, 1.0 mm 4C 50-00980 M12 socket to 1.0 mm 50-00987 M12 plug, 22 AWG, 30-03006 wire	

5

4

3

2

1