


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00983	Connector, M12 A-code socket, 8 pin, 12xL22 mm, molding style, solder cup, gold plated, IP67, shielded	1	
2	50-00990	Connector, M12 A-code plug, 8 pin, 12xL22 mm, molding style, solder cup, gold plated, IP67, shielded	1	
3	30-03039	Wire, 8C TS, 24 AWG, UL21765, 300V, 105C, 60C oil, UV, 7 mm, shielded, VW-1, TPU	1	
4	24-00349	Overmold, M12 plug and jack, 180°	2	TPU, black

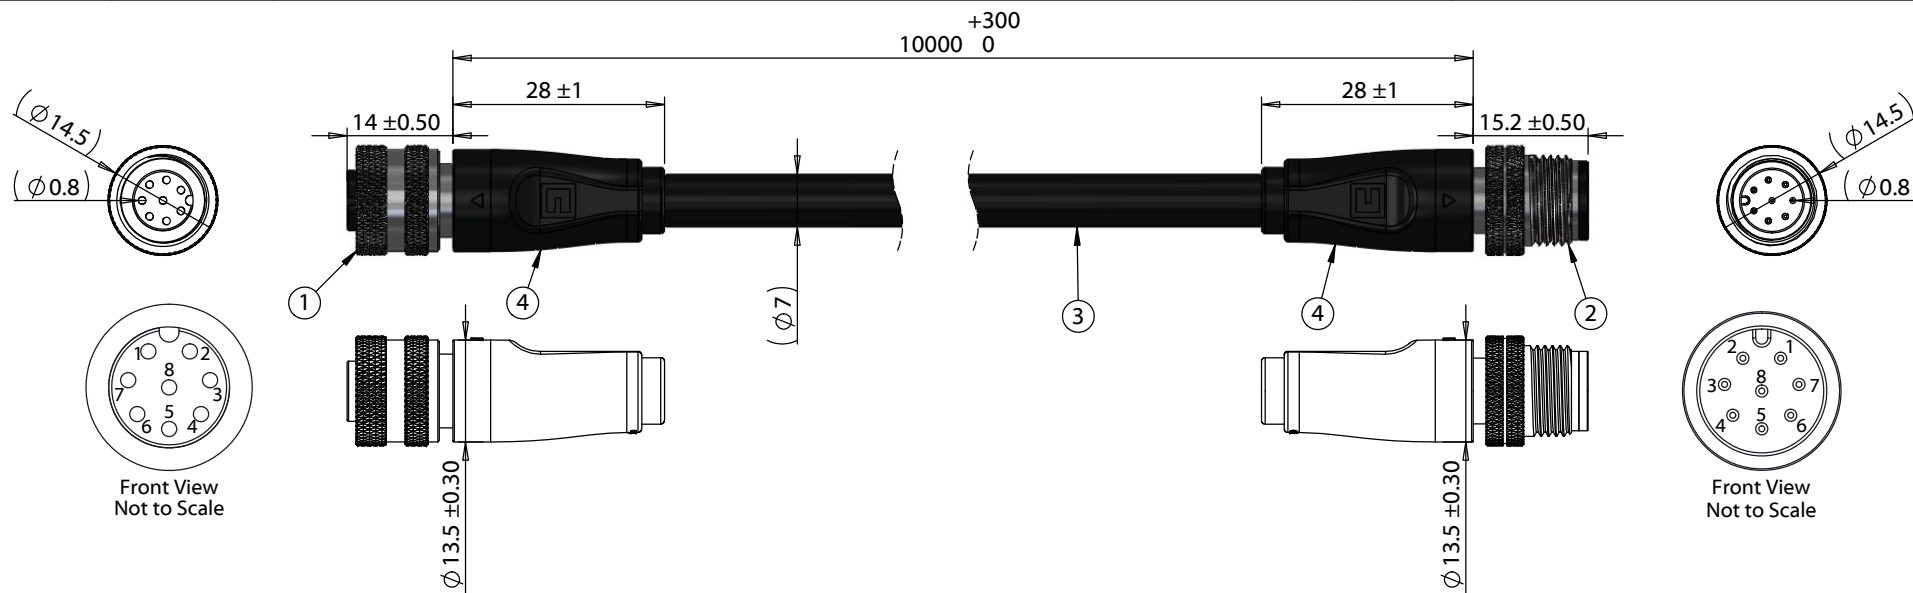

Notes:
Cable rated for 30 V, 2 A
Temperature: -40 ~ 105 °C
Oil resistant up to 60 °C
Water resistant up to 75 °C
UV resistant

IP67 waterproof rating when mated with corresponding (IP67) connector

Functionally equivalent components may be substituted

Wiring Diagram		
50-00983	wire color	50-00990
1	red	1
2	yellow	2
3	black	3
4	white	4
5	orange	5
6	blue	6
7	green	7
8	purple	8
Shell	shield/drain	Shell

Revision:	Date:	Description:	Prepared:	Notes:	<div>TENSILITY</div> <div> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com </div>
A	10/15/2020	Initial release	Verified:	RoHS compliant	
			Dimensions are in millimeters.	Function test: no open, no short circuit, no intermittent	
			Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Cable, 10000 mm, 0.8 mm 8C 50-00983 M12 socket to 0.8 mm 50-00990 M12 plug, 24 AWG, 30-03039 wire	
					<div>Size: A</div> <div>Part number: 10-06204</div> <div>Scale: 1:1</div> <div>Sheet 1 of 1</div>