

Ratings
Voltage: 300 V
Temperature: -20~80°C
Flammability: VW-1

Conductor
Conductor count: 4
Gauge: 26 AWG 0.13 mm²
Material: tinned copper strands
Strand size: Ø 0.08 mm x 26
Resistance at 20 °C: 150 Ω/km max

Insulator
Material: PVC
Color: red, black, white, green
Diameter: Ø 1 ± 0.1mm
Nominal thickness: 0.25 mm
Tensile strength: 2.11 kgf/mm² min
Resistance at 20 °C: 10 MΩ/km min

Drain
Stranding: Ø 0.08 mm x 26, 26 AWG

Shield
Type: braid + foil
Material: aluminum mylar, tinned copper strands
Coverage: 65% minimum



Outer jacket
Material: PVC
Color: black
Diameter: Ø4.5 ± 0.2 mm
Nominal thickness: 0.79 mm
Tensile strength: 1.05 kgf/mm² min

Wire marking:
E339579 UL AWM STYLE 2464 26 AWG 80°C 300V VW-1 --- cUL
AWM I/II A 80°C 300V FT1 TENSILITY

Tests
Spark test: 3.0 kV
After aging at 113 ±2 °C for 7 days:
Minimum tensile strength 70 % original
Minimum elongation 65 % original

Use: Internal wiring or external interconnection of electronic equipment.

Flex operation:
10 million cycles min in dynamic bend radius conditions
Bend radius
Static: 8 times the outer diameter (36 mm)
Dynamic: 12 times the outer diameter (54 mm)

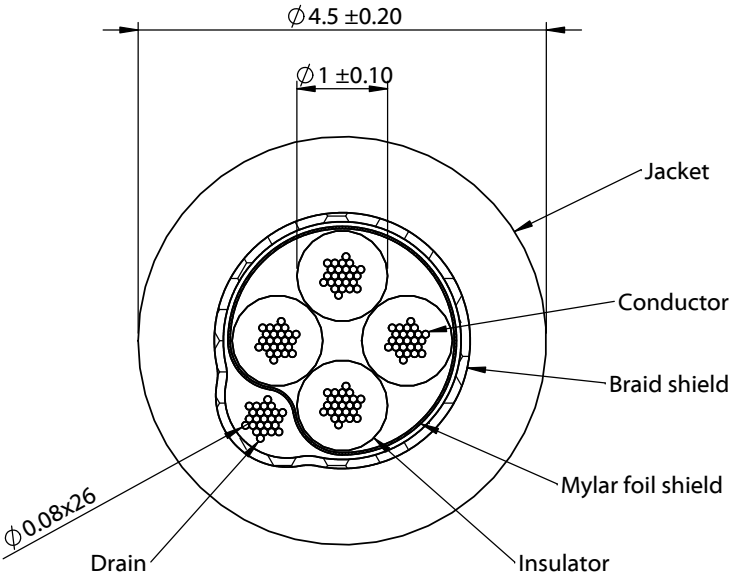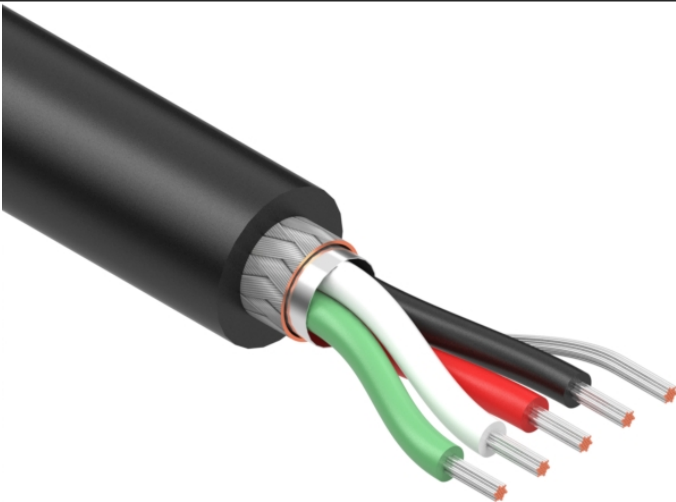

Revision:	Date:	Description:
A	05/18/2023	Initial release

Prepared: RR	Digitally signed by RR Date: 2024.07.22 10:28:25 -07'00'
Verified: AL	Digitally signed by AL Date: 2024.07.22 17:54:56 -07'00'
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	

Notes: RoHS compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 4C, TS, 26 AWG, UL2464, cont flex, 300V, 80C, 4.5 mm, VW-1, PVC

TENSILITY			
<i>tel</i> 1.541.323.3228		<i>800</i> 877.670.7118	
<i>fax</i> 1.541.323.4202		<i>web</i> tensility.com	
Size: A		Part number: 30-03218	
Scale: 12:1			
		Sheet 1 of 1	