ဂ္ဂ

Ratings Voltage: 30 V Temperature: 80°C Flammability: FT2 UL AWM Style 1640

Conductor

Conductor count: 2

Colors: white (30-02924), yellow (30-02925) Gauge: 24 AWG 0.2 mm²

Material: tinned copper strands

Strand size: 0.1mm x 26

Resistance at 20 °C: 94.2 Ω /km max

Target impedance: 100Ω


Insulator

Material: foamed PE Color: white, yellow Diameter: 1.25 ± 0.1 mm Nominal thickness: 0.32 mm Resistance at 20 °C: 10 M Ω /km min

Pitch ratio: 25mm

Pitch:



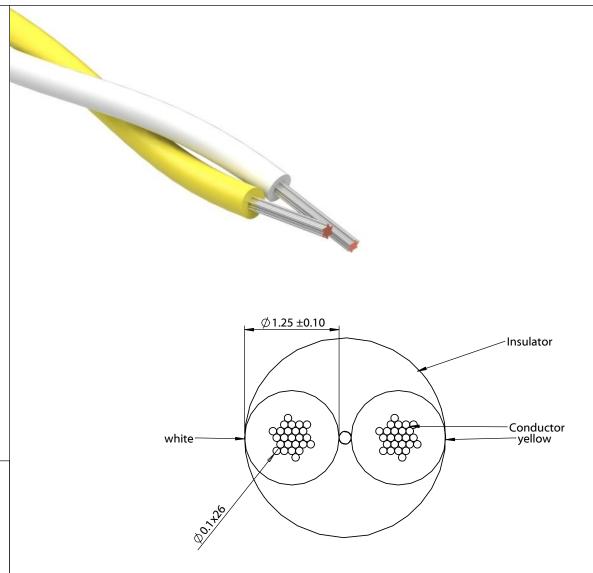

Revision:	Date:	Description:	Prepared:
Α	6/15/23	Initial release	
			Verified:
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm
		<u> </u>	Λ.ΛΛ. <u>'</u> 0.03 IIIII

Notes: RoHS compliant Function test: no open, no short circuit, no intermittent

Description:

Wire, 2C, 1 twisted pair, TS, 24 AWG, UL1640, 30V, 80C, 1.25 mm, FT2, cellular PE, white, yellow

tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com

Size: Part number: 30-03285

Scale: 20:1

Sheet 1 of 1

3

2