

Style
M12 Socket, shielded
6 pin
A-coding

Ratings
Voltage: 30 V
Current: 2 A


Operating Temperature Range
-40~105 °C

- Materials**
- ① Insulator: Polyamide 66 (PA66), UL94 HB, black
 - ② Pin: C5191 phosphor bronze, gold plated
 - ③ Shell: C3604 brass, nickel plated
 - ④ Nut: C3604 brass, nickel plated
 - ⑤ O-ring: Silicone rubber
 - ⑥ Epoxy: Epoxy resin



Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements
Life cycle: 500 mating cycles minimum



Environmental Requirements
Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 mΩ.
Waterproof: IP67






Front View
Not to Scale

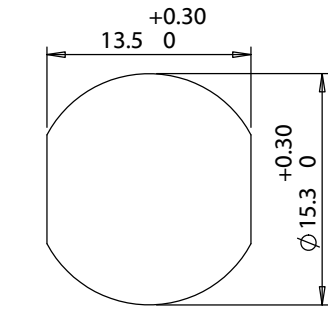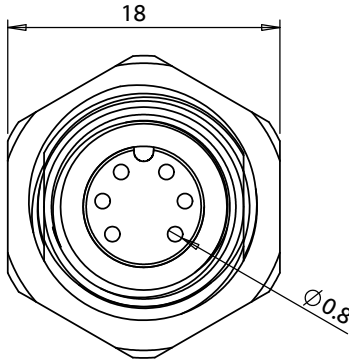

Panel cutout (PG9)
Panel thickness (4.5mm max.)

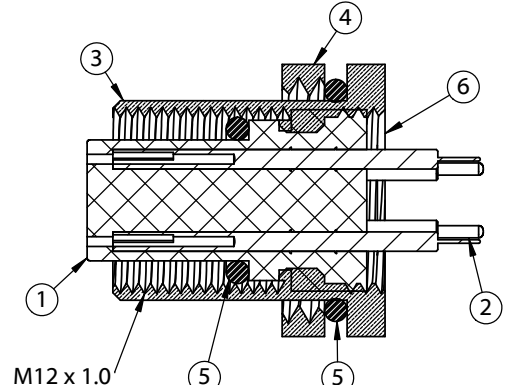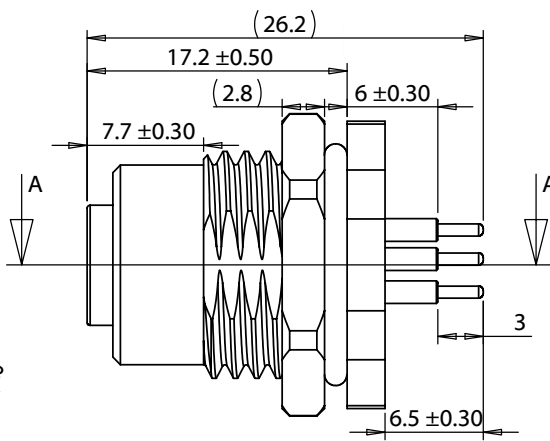

SECTION A-A

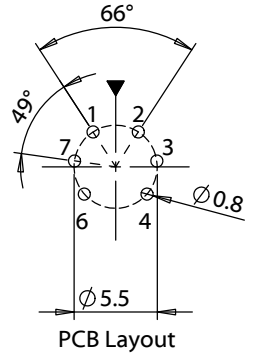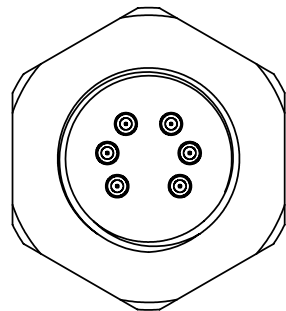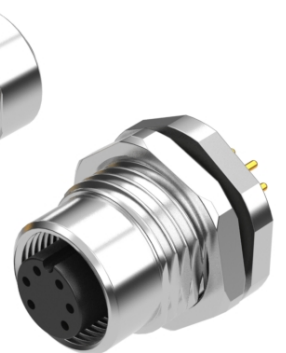

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com	
A	10/6/2020	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent		
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, M12 A-code socket, 6 pin, 12xL26.2 mm, panel mount, thru hole, gold plated, IP67	Size: A	Part number: 54-00237
					Scale: 2:1	Sheet 1 of 1