

Style
M12 Socket, shielded
4 pin
A-coding

Ratings
Voltage: 250 V
Current: 4 A

Operating Temperature Range
-40~120°C

- Materials**
- ① Insulator: Polyamide 66 (PA66), UL94 V-0, black
 - ② Pin: C3604 Brass, gold plated
 - ③ M12 Shell: C3604 Brass, nickel plated
 - ④ Outer Shell: C3604 Brass, nickel plated
 - ⑤ Metal ring: C3604 Brass, nickel plated
 - ⑥ Collet nut: C3604 Brass, nickel plated
 - ⑦ Collet: Polyamide 66 (PA66), UL94 V-0, black
 - ⑧ O-ring: Silicone, green
 - ⑨ Washer: 65Mn Steel, nickel plated


Electrical Requirements
Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements
Life cycle: 1000 mating cycles minimum


Assembly Info
Waterproof: IP67
Suitable cable OD: 6.0 ~ 8.2 mm
Terminal style: screw
Max torque force:
M12 shell: 0.4 Nm
Collect nut: 0.8 ~ 1.0 Nm

Recommended Wire




AWG	TPU wire	PVC wire	4A compatible
18	30-03004	30-01576	Yes
20	30-03005	30-01577	Yes
22	30-03006	30-01578	Yes
		30-03378	Yes



Front View
Not to Scale

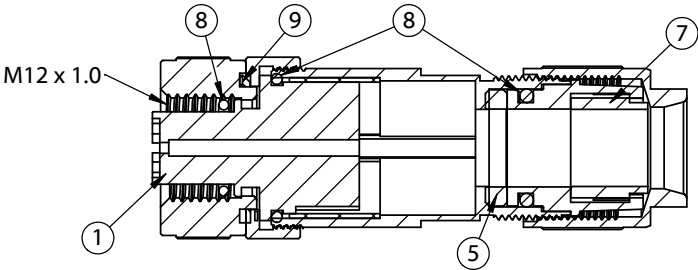

SECTION A-A

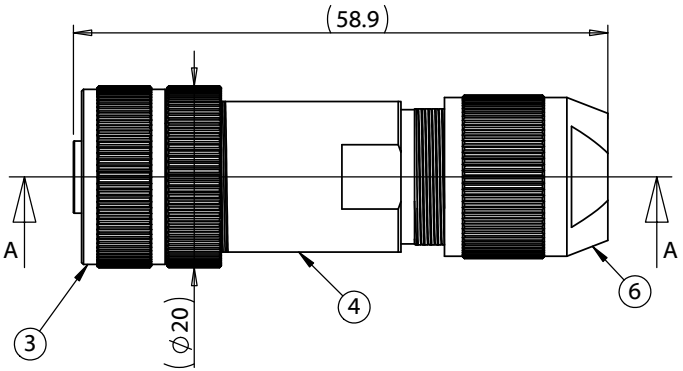

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com		
A	12/23/2024	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent			
			Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, M12 A-code socket, 4 pin, 12xL58.9 mm, gold plated, assembly style, screw terminal, IP67, shielded	Size: A	Part number: 55-00287	Sheet 1 of 1
					Scale: 1.2:1		