

Style

M12 Socket, shielded
5 pin
D-coding

Ratings

Voltage: 60 V
Current: 4 A

Operating Temperature Range

-40~120°C

Materials

- ① Insulator: Polyamide 66 (PA66), UL94 V-0, black
- ② Pin: C3604 Brass, gold plated
- ③ M12 Shell: C3604 Brass, nickel plated
- ④ Outer Shell: C3604 Brass, nickel plated
- ⑤ Metal ring: C3604 Brass, nickel plated
- ⑥ Collet: Polyamide 66 (PA66), UL94 V-0, black
- ⑦ Collet nut: C3604 Brass, nickel plated
- ⑧ O-ring: Silicone, green
- ⑨ Washer: 65Mn Steel, nickel plated

Electrical Requirements

Dielectric strength: 1 min @ 500 Vac
Insulation resistance: 100 MΩ @ 500 Vdc
Contact resistance: 10 mΩ or less

Mechanical Requirements


Life cycle: 1000 mating cycles minimum

Assembly Info


Waterproof: IP67
Suitable cable OD: 6.0 ~ 8.2 mm
Terminal style: screw
Max torque force:
M12 shell: 0.4 Nm
Collect nut: 0.8 ~ 1.0 Nm

Recommended Wires



AWG	TPU wire	PVC wire	4A compatible
18	30-03012	30-01584	Yes
20	30-03013	30-01585	Yes
22	30-03014	30-01586	Yes
24	30-03015	30-01587	Yes
		30-02976	Yes



Front View
Not to Scale

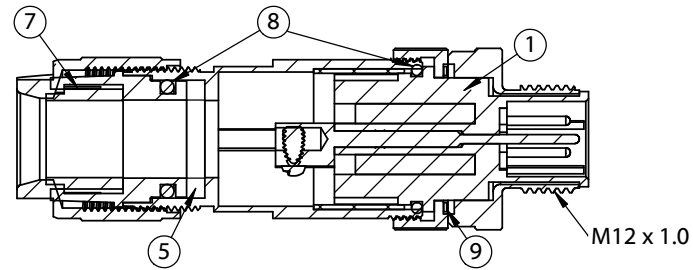

SECTION A-A
(63)

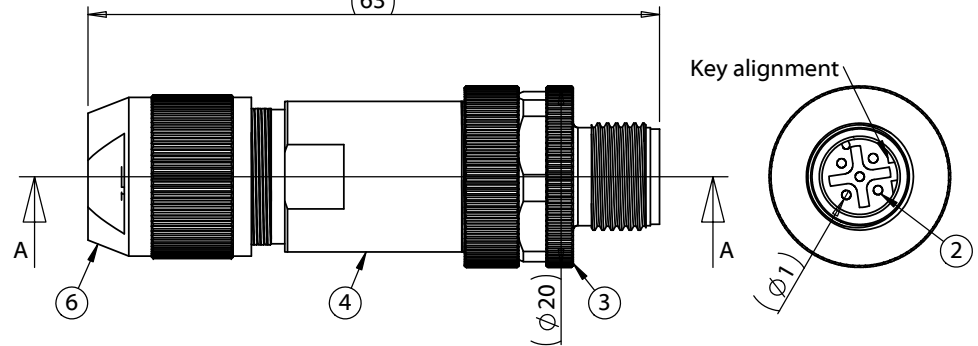

Revision:	Date:	Description:
A	12/23/2024	Initial release

Prepared:	Notes:
	RoHS compliant
Verified:	Function test: no open, no short circuit, no intermittent
Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm	Description: Connector, M12 D-code plug, 5 pin, 12xL63 mm, gold plated, assembly style, screw terminal, IP67, shielded

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size:	Part number:
A	55-00298
Scale: 1.2:1	Sheet 1 of 1