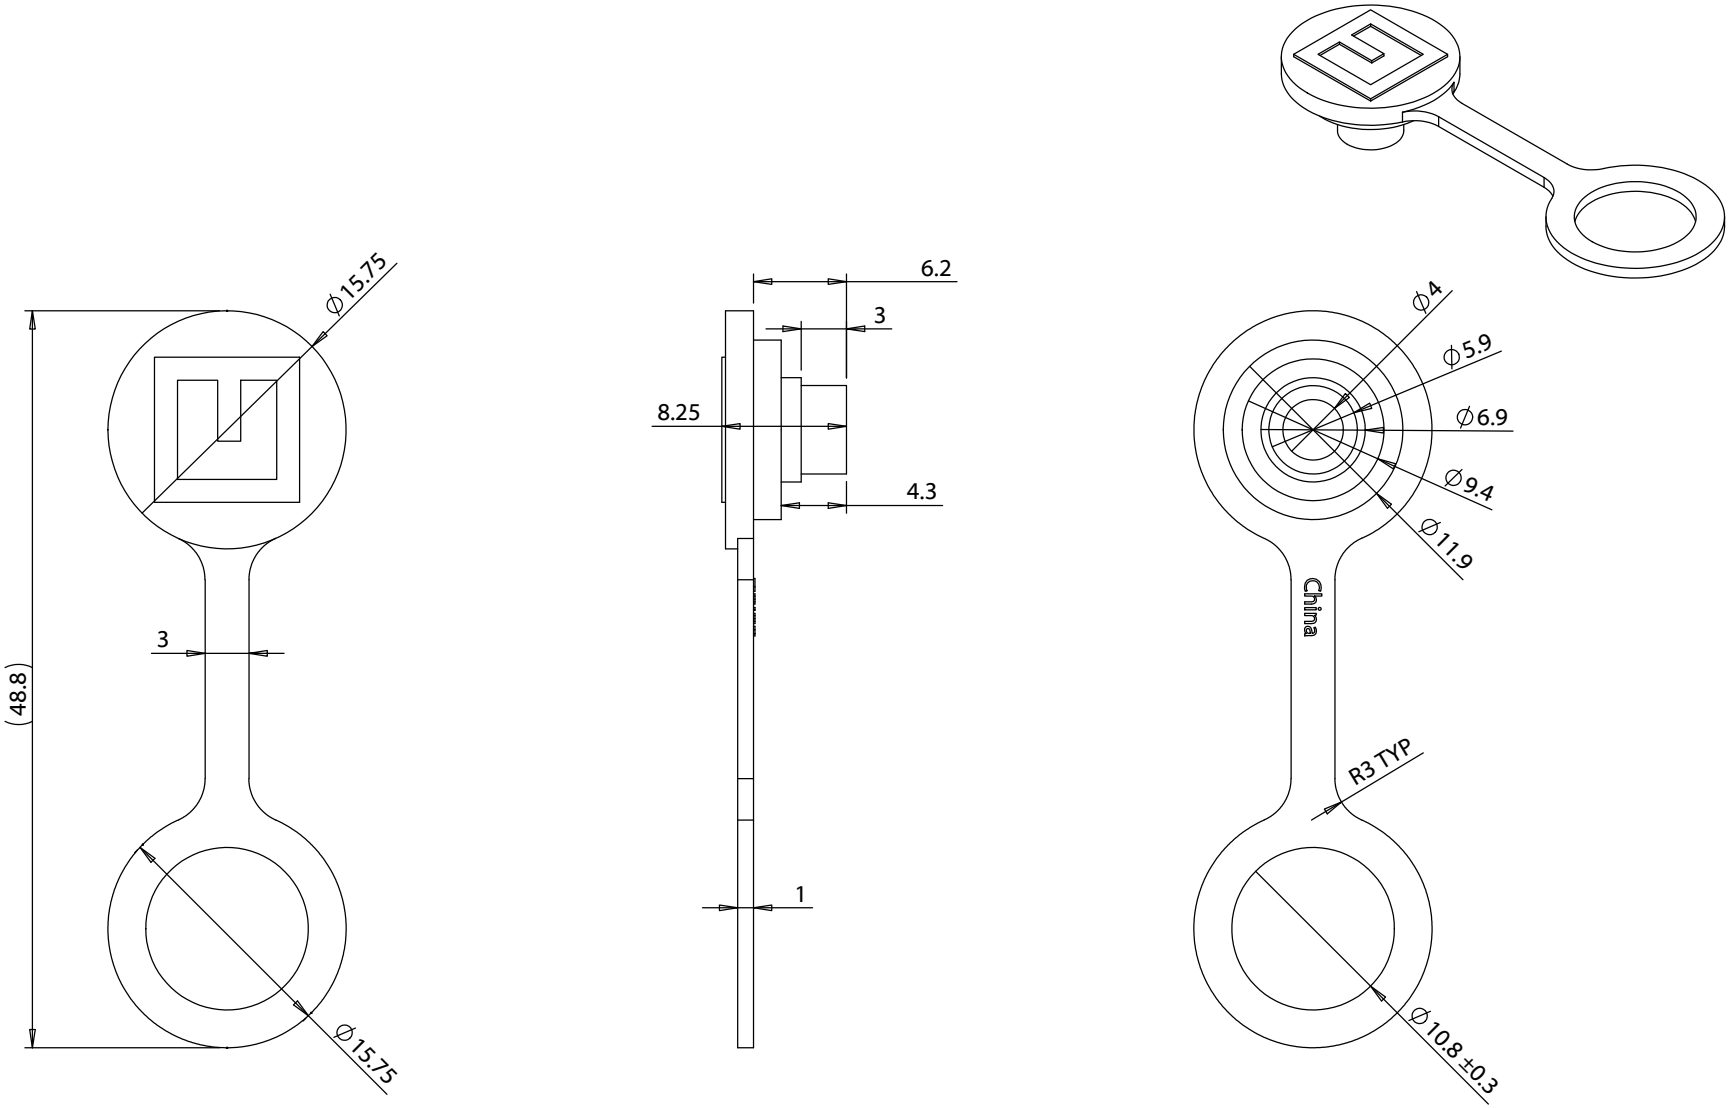


Notes:
For use with 5.5 mm dc jacks only

Revision:	Date:	Description:
A	03/07/2025	Initial release

Prepared: KW Digitally signed by KW Date: 2026.06.17 16:38:29 -07'00'

Verified: CR Digitally signed by CR Date: 2026.07.24 09:50:19 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cap, 5.5 mm sealed dc jack, IP6X waterproof, TPV

TENSILITY
tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 55-00315

Scale: 2:1

Sheet 1 of 1

5 4 3 2 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com