Materials


① Outer Sleeve, TPV, black
② inner Sleeve, POM, black

Operating Temperature Range


-20 ~ 80 °C


Assembly Info


Full connector assembly	Connector	Wire OD
55-00201	50-01076	3.9 - 4.5
55-00204	50-01077	3.9 - 4.5





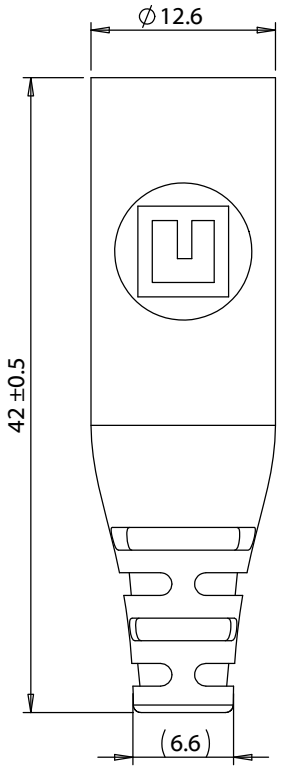

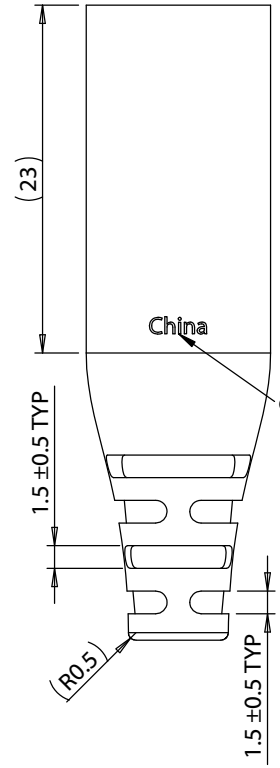

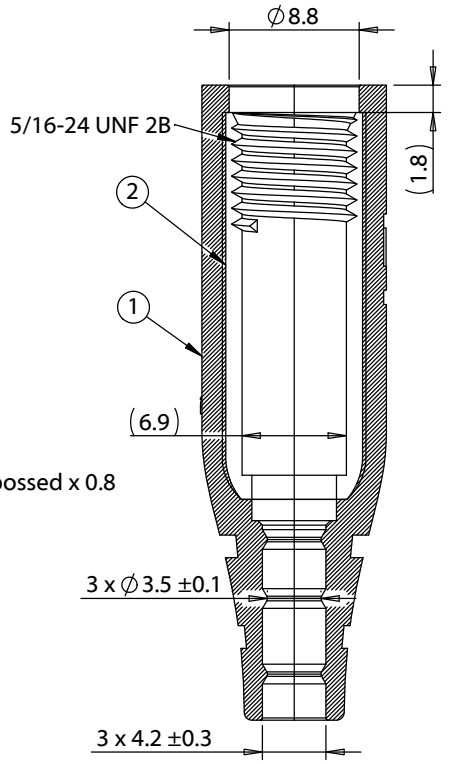

Revision:	Date:	Description:
A	02/21/2025	Initial release

Prepared: CR
Digitally signed by CR
Date: 2026.07.24 11:14:55 -07'00'

Verified: KW
Digitally signed by KW
Date: 2026.07.24 15:31:54 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.3 mm
X.X: ± 0.1 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Hardware, outer plastic sleeve, 3.9-4.5 mm, TPV

TENSILITY

tel 1.541.323.3228 *800* 877.670.7118
fax 1.541.323.4202 *web* tensility.com

Size: A

Part number: 56-00034

Scale: 2:1

Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com