Materials


① Outer Sleeve, TPV, black
② inner Sleeve, POM, black

Operating Temperature Range


-20 ~ 80 ℃


Assembly Info


Full connector assembly	Connector	Wire OD
55-00202	50-01076	3.2 - 3.8
55-00205	50-01077	3.2 - 3.8





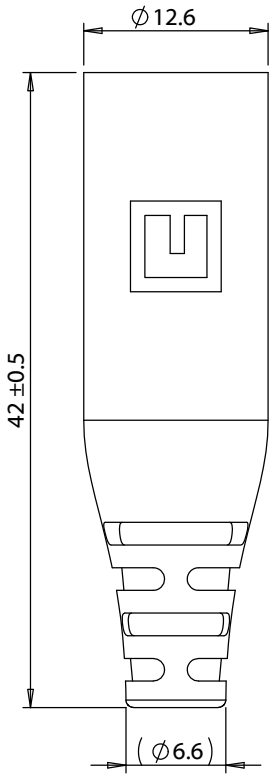

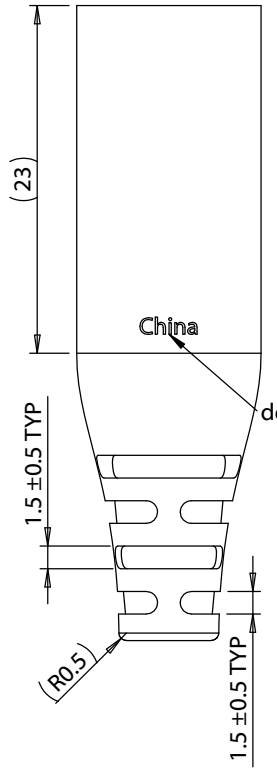

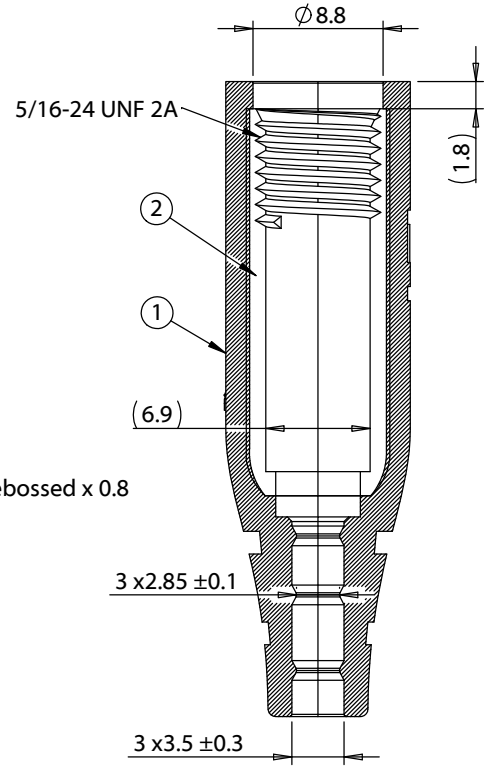

Revision:	Date:	Description:
A	02/25/2025	Initial release

Prepared: CR Digitally signed by CR Date: 2026.07.24 11:16:10 -07'00'

Verified: KW Digitally signed by KW Date: 2026.07.24 15:32:05 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.3 mm
X.X: ± 0.1 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Hardware, outer plastic sleeve, 3.2-3.8 mm, TPV

TENSILITY
tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A

Part number: 56-00035

Scale: 2:1

Sheet 1 of 1

To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com