

Ratings

Voltage: 60 V
 Temperature: -40~125 °C

Conductor

Conductor count: 1
 Gauge: 8 AWG 7.74 mm²
 Material: bare copper strands
 Strand size: $\varnothing 0.72$ mm x 19
 Resistance at 20 °C: 2.144 Ω /km max

Insulator

Material: XLPE
 Color: gray
 Diameter: $\varnothing 4.7 \pm 0.20$ mm
 Nominal thickness: 0.56 mm



Wire marking: TXL AUTOMOTIVE PRIMARY WIRE 8 AWG XLPE 125°C
 SAE J1128 TENSILITY

Mechanical Tests

After aging at 155 \pm 3°C for 7 days
 Minimum tensile strength 10 MPa
 Minimum elongation 150% original
 Dielectric test: 1000 Vrms for 1 minute without breakdown
 Flammability: SAE J1128 Resistance to Flame Propagation
 Ozone resistance: 192 hrs @ 65°C, 100 pphm, no cracks or splits

Fluid Compatibility Tests (Name: fluid, test temp (°C))

Engine oil: ASTM D471 IRM-902, 50 \pm 3
 Gasoline: ASTM D471 Ref Fuel C, 23 \pm 5
 Ethanol: 85% ethanol + 15% ASTM D471, Ref Fuel C, 23 \pm 5
 Diesel fuel: 90% ASTM D471 IRM 903 +10% p-xylene, 23 \pm 5
 Power steering: ASTM D471 IRM 903, 50 \pm 3
 Auto trans: Dexron VI SAE J311, 50 \pm 3
 Engine coolant: 50% dist. water + 50% ethylene glycol, 50 \pm 3
 Battery acid: H2SO4 spec. gravity = 1.26 \pm 0.005, 23 \pm 5

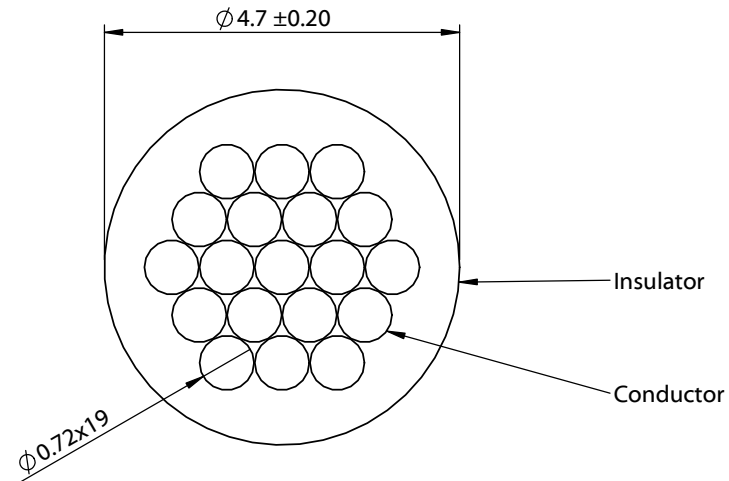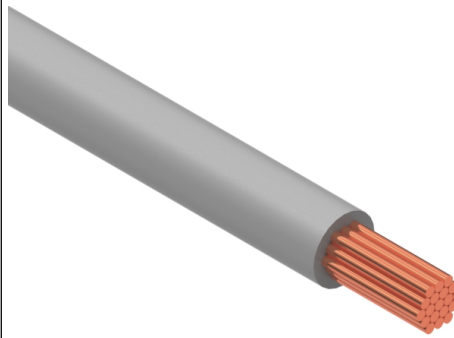

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Halogen free	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>	
A	12/10/2021	Initial release	Verified:			
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:	
				Wire, hook-up, BC, 8 AWG, TXL automotive SAE J1128, 60V, 125C, 4.7 mm, XLPE, gray	A 30-02150	
				Scale: 10:1		Sheet 1 of 1

5

4

3

2

1