

**Ratings**

Voltage: 300 V

Temperature:

Dynamic Temperature: - 25 ~ 105 °C

Static Temperature: - 40 ~105 °C

Flammability: VW-1

**Conductor**

Conductor count: 1

Gauge: 24 AWG 0.20 mm<sup>2</sup>

Material: tinned copper strands

Strand size:  $\varnothing 0.16(x 11)$  mmResistance at 20 °C: 94.2  $\Omega$  /km max**Insulator**

Material: PVC

Color: Red

Diameter:  $\varnothing 1.4 \pm 0.10$  mm

Nominal thickness: 0.38 mm

Resistance at 20 °C: 2.5 M $\Omega$  /kft**Wire marking:** E339579 UL AWM STYLE 1569 105°C 300V or 1007  
24 AWG 80°C 300V VW-1 --- cUL AWM I A 105°C 300V FT1 TENSILITY**Tests**

Insulation tensile strength: 10.3 MPa

After aging at 136  $\pm 1$  °C for 7 days:

Minimum tensile strength 70 % original

Minimum elongation 65 % original

Heat shock: 136  $\pm 1$  °C / 1 hour, no observed degradationDeformation: Load 2.45N, 121  $\pm 1$  °C / 1 hour


Maximum decrease in thickness 50%

Cold bend: -25  $\pm 2$  °C / 4 hour, no observed cracking

Spark test: 3000 V

**Minimum Bend Radius**

Static: 4 times diameter (5.6 mm)

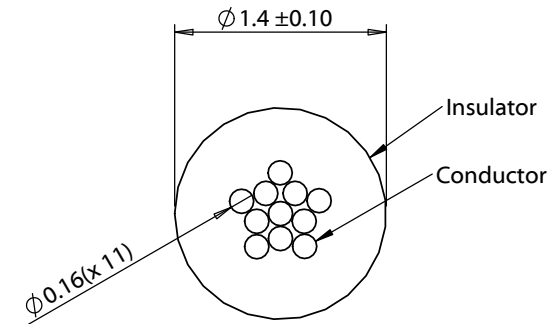

Revision:	Date:	Description:	Prepared:	Notes:	<b>TENSILITY</b> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	11/25/25	Initial release	Verified:	RoHS compliant Function test: no open, no short circuit, no intermittent	
			Dimensions are in millimeters. Tolerances: X: $\pm 0.5$ mm X.X: $\pm 0.3$ mm X.XX: $\pm 0.05$ mm	Description:	Size: Part number:
				Wire, hook-up, TS, 24 AWG, UL1007, UL1569, 300V, 105C, 1.4 mm, VW-1, PVC, red	A 30-03740
				Scale: 20:1	Sheet 1 of 1

5

4

3

2

1